



SAFETY IS ALL WE DO™

2026 Safety & Industrial Products

www.DriverIndustrialSafety.com

DRIVER™

INDUSTRIAL SAFETY

SAFETY IS ALL WE DO™

OUR MISSION

To create and innovate dependable safety products for industrial applications. Our portfolio of brands help identify and safely secure vehicles and assets, protecting the people who work alongside them. We proudly manufacture our safety products for the harshest environments in the WORLD.

OUR PURPOSE

At Driver Industrial Safety™, SAFETY IS ALL WE DO™. Our passion is to solve the critical need for well-engineered and dependable products for worksite safety. To ensure the best solutions, our innovation is driven by global partnerships and field tested in the world's harshest working conditions.


Meet Our Brands



Cable Protectors, Hose Ramps, and Dropovers




Cable Protectors, Ground Protection Mats, and Bulk Containers

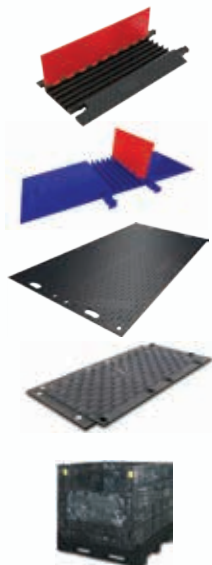

Hi-Visibility, Heavy Equipment Vehicle Identification Displays



General Purpose & Heavy Equipment Heavy Duty Wheel Chocks

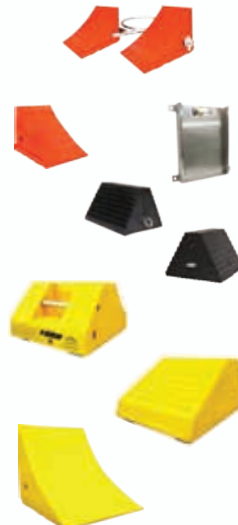

Warning Whip Solutions, Whip Lights & Safety Accessories




SAFETY IS ALL WE DO™

Driver Industrial Safety™ is a quality manufacturer of market-driven industrial Safety Products for industrial and commercial industries. We are a privately owned and operated company headquartered in Henderson, Colorado, U.S.A. With manufacturing and warehouse facilities in the US and Canada, we sell through our global distribution channels. **Driver Industrial Safety™** was originally founded in 2004, under our former recognized name **SafetyWhips®**.

Our five branded product lines lead the industry in robust quality and engineering: **Elasco Products** line of Cable Protectors and Dropovers, **RhinoGuard™** Cable Protectors, Ground Protection Mats and Bulk Containers, **NVIZN Identification Displays®**, **Toro®** Heavy Duty Wheel Chocks, and **SafetyWhips®** Warning Whips.

Our company was founded on the basis that there is a critical need for well engineered and dependable products for work site safety. Clients have come to Depend on Driver to keep their worksite safe. Our combined 100+ years in combined LED and electronics manufacturing provides the best engineered products available for worksite safety. While **Driver Industrial Safety™** products have been poorly copied, we are still unmatched in performance and durability.

Markets Served

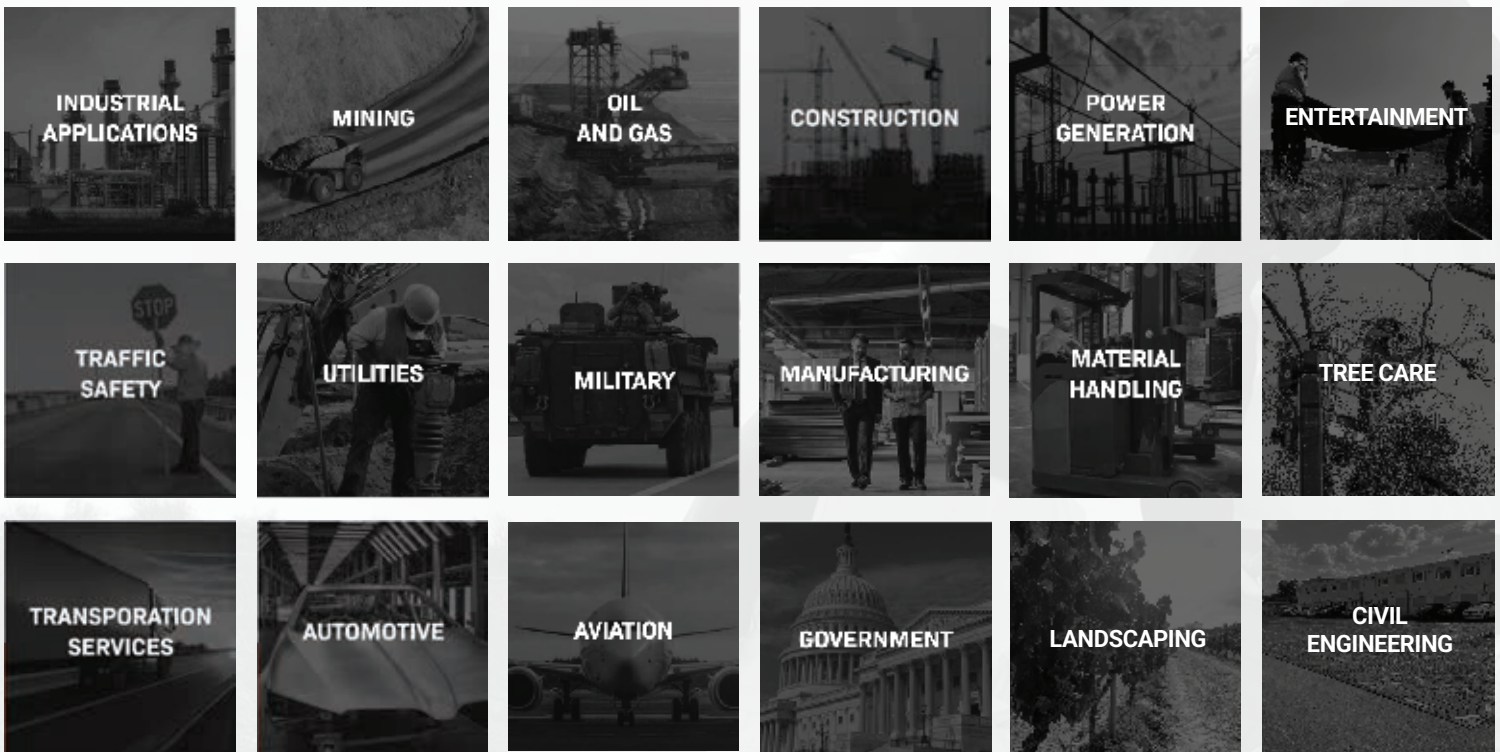

Driver Industrial Safety™ is a Member of and Proudly Supports



TABLE OF CONTENTS



DRIVER INDUSTRIAL SAFETY

About Driver Industrial Safety™	2
Markets Served & Memberships	3
Table of Contents	4
Jobsite Access Options	5



ELASCO PRODUCTS

Cable Protectors & Dropovers	7
------------------------------	---



CABLE PROTECTORS, CRATES & GROUND PROTECTION MATS

5-Channel Standard Ramp Cable Protectors	9
Bulk Containers	10
5-Channel ADA Ramp Cable Protectors	11
General Purpose Ground Protection Mats	12
Heavy Duty Ground Protection Mats	13



VEHICLE IDENTIFICATION DISPLAYS

LED Programmable Displays 9" and 12"	15
LED Programmable Displays 16", 18", 27", and 36"	16
Payload, Message Board & Signal Light Displays	17
LED Reflective Backlit Displays 9", 12", 16", 18", 27", 36", and 56"	18
Featured Products & Custom Displays Interchangeable Characters, 3-Sided Backlits, and Mounting Brackets & Accessories	19
Universal Platform Mounting Systems	20



HEAVY DUTY WHEEL CHOCKS

Heavy Duty Wheel Chocks	22
Wheel Chock Accessories Mounting Brackets, Rubber & Aluminum Cleats	23
General Purpose Rubber Chocks, 15 Ton, 20 Ton, 25 Ton, 35 Ton	24
Heavy Equipment 40 Ton, 70 Ton, 75 Ton, 165 Ton, 255 Ton, 400 Ton	25



WARNING WHIPS & SAFETY SOLUTIONS

Light Duty Fiberglass Warning Whips Non-Powered	27
Heavy Duty Fiberglass Warning Whips Threaded Hex (Non-Powered)	28
Heavy Duty Fiberglass Warning Whips Threaded Hex (Powered)	29
Heavy Duty Fiberglass Warning Whips Quick Disconnect (Non-Powered)	30
Heavy Duty Fiberglass Warning Whips Quick Disconnect (Powered)	31
Telescoping Warning Whips Non-Powered & Powered	32
Super Duty All Weather™ Warning Whips Threaded Hex (Powered)	33
Super Duty LED Warning Whips	34
Super Duty LED Warning Whips Dual Color, 12' Whips & WSSM Mount	35
Warning Whip LED Lights SC Series: Single & Dual Color	36
Heavy Duty Safety Flags	37
Warning Whip Bases & Adapters Threaded Hex, Spring Mounts & Quick Disconnect	38
Warning Whip Mounts Permanent & Temporary	39
Warning Whip Hitch Mounts Standard & Extended	40
Accessories / Personal & Traffic Safety Whip Replacement Parts First Aid Clean-up Kits Fire Extinguishers Industrial Traffic Safety	41
LED Warning Beacons	42

JOBSITE ACCESS OPTIONS



PRODUCT	PART #	BRAND	OPTIONS / ADDITIONAL INFORMATION
1 General Purpose Wheel Chocks	WC-UQ400	TORO® Chocks	Models for Max. GVWs of 15 Ton (30,000 lbs/13,607.8 kg) to 40 Ton (80,000 lbs/36,287.4 kg).
2 LED Warning Beacons	SL-1M-A	Driver Industrial Safety™	Short Profile, Magnet/Permanent Mount. White LEDs, interchangeable colored lenses (sold separately).
3 Whip Stabilizer Spring Mount	SDL-WSSM-KIT	SafetyWhips®	For 10-12 ft SafetyWhips Models (recommended for 8' Whip Models) to support the wind resistance.
4 Heavy Duty Window Mount	519.320-V	SafetyWhips®	For Powered, Light Duty Whips up to 8 ft - includes Cigarette Cord (519.320NP-V for NP whips).
5 Light Duty Warning Whips	ATV308-3-M	SafetyWhips®	3 ft, (5/16") Non-powered "All Weather" Fiberglass Whips with Threaded Base (3/8" rods available).
6 Medium Duty Magnet Mounts	519.33LHR	SafetyWhips®	Mounting solution for Powered Whips up to 8 ft with Threaded & Quick Disconnect options.
7 Super Duty Warning Whips	SD05-X-30B-SC4CA	SafetyWhips®	5 ft, Powered "All Weather" Whip, 16" Reflective "X" Flag, Heavy Duty Spring and Bright LED Light.
8 Heavy Duty Angle Bracket Mount	ABM	SafetyWhips®	Permanent mounting solution for use with Threaded or Quick Disconnect whip base mounts.
9 Heavy Duty Spring Mounts - Powered	519.30B	SafetyWhips®	Heavy Duty Springs to help reduce whip breakage, prolonging your Safety Whip life.
10 Quick Disconnect Whip KIT - Powered	SWQD-KIT-PT	SafetyWhips®	Includes Powered Whip Adapter and Powered Quick Disconnect Base with Pig Tail power lead.
11 SC4 Series / SC3 Series LED Whip Lights	CA-CA / SC3-A	SafetyWhips®	SC4 - High profile, Bright LEDs (flashing or non-flashing) / SC3 - Low profile, Super Bright LEDs.
12 Heavy Duty Telescoping Warning Whips	TW13D-X	SafetyWhips®	13 ft, Powered "Adjustable" Fiberglass Whips - Collapsible & Extendable with 3 Locking Sections.
13 Hitch Mount for Telescoping Whips - Powered	HMTDA	SafetyWhips®	Mounting solution powered via External Waterproof Connector (non-powered options available).
14 Heavy Duty Aluminum Stake Pocket Mount	SPM	SafetyWhips®	Universal fit with wedge application for both Threaded and Disconnect Whips.
15 Industrial Traffic & Personal Safety Products *	VARIES	SafetyWhips®	3M Conspicuity Tape, Road Hazard Kits, First Aid Kits, Fire Extinguishers and Mounting Brackets.
16 Super Duty LED Warning Whips	SDL06G-XY	SafetyWhips®	The Toughest "All Weather" Whip with pressure vent protection. Full top to bottom LED lighting.
17 Heavy Duty Fold Down Mount	FDM	SafetyWhips®	Heavy Duty Aluminum mounting solution to attach whips to tool box or back rack. Pull pin to fold down.
18 Industrial Vehicle Identification Fleet Decals	VARIES	Industrial Decals Co.™	Industrial Grade Fleet Decals & Fleet Management, Vehicle Magnetics, Safety Labels, Fire Tags.
19 Light Duty, 3-Sided LED Backlit ID Display	VID-SA	NVIZN™ Identification Displays	For pickup trucks/passenger vehicles - Reflective backing with Unit # and (3) Heavy Duty Magnetic feet.

* Industrial Traffic & Personal Safety Products - Not Available in Canada

We Provide Safety Driven Solutions, Wherever You Are.

Meet Our Brand



ELASCO
PRODUCTS®

- ➔ Trusted Polyurethane Cable Protection Since 1988
- ➔ Elasco Manufacturing Is Back - Exclusively Manufactured by Driver
- ➔ Built to Original Elasco Designs and Specifications
- ➔ Heavy-Duty Solutions for Foot, Vehicle and Equipment Traffic
- ➔ ELASGLOW® Glow-in-the-Dark Visibility - No Batteries or Wiring
- ➔ ADA-Compliant Ramp Options for Accessible Pathways
- ➔ Channel Configurations from One to Five



Elasco Safety Products

Built to Original Elasco Specifications ▪ One to Five Channel Configurations ▪ ADA and ELASGLOW® Options



Elasco Products is back! Manufacturing is returning in phases. Contact Driver for current availability.



VIEW WEBSITE



VIEW CATALOG

Elasco Products has been making polyurethane cable protectors since 1988. If you've run cable across a floor at a concert, a mine site, an airfield, or a utility job, you've probably driven over one. **Driver Industrial Safety™** now holds an exclusive worldwide license from Motis Brands to manufacture, market, and sell the **Elasco Products** line, built to the original Elasco designs and specifications, on Driver tooling, at our Colorado production facility and with select partners.

Elasco Products built its reputation on cable protectors that survive what rolls over them. Polyurethane rather than rigid plastic, in channel configurations from a single cord to five, rated for foot traffic, vehicle traffic, and heavy equipment depending on the model. ADA-compliant ramps where you need them, and ELASGLOW® glow-in-the-dark models that charge in ten seconds of UV and stay visible all night with no batteries or wiring. Mining, utilities, entertainment, oil and gas, transportation.

We're bringing the line back in phases rather than all at once. Tooling is underway for a first group of priority cable protectors and dropovers, and we'll expand from there based on what our customers need. Scan the code at left for current availability.

The two QR codes on the left open the full **Elasco Products** line and our current catalog. This page shows five products, the line runs to more channel counts, sizes, and colors, including ELASGLOW® versions.



UG5140-ADA
UltraGuard 5-Channel ADA Cable Ramp
on a pedestrian walkway



MG3200
Mighty Guard 3-Channel Cable Protector
in a warehouse aisle

Phase 1 Products



UG5140
UltraGuard 5-Channel
Cable Protector



UG5140-ADA
UltraGuard 5-Channel
ADA Cable Ramp



MG3200
Mighty Guard 3-Channel
Cable Protector



ED8200
Single-Channel Dropover



ED1010
Single-Channel Dropover

Specifications

Part #	Product Name	Description
UG5140	UltraGuard 5-Channel Cable Protector	1.38" channels / Push-button lid / Heavy duty
UG5140-ADA	UltraGuard 5-Channel ADA Cable Ramp	1.38" channels / ADA-compliant ramp profile
MG3200	Mighty Guard 3-Channel Cable Protector	2" x 2" channels / 12,250 lb per tire
ED8200	Single-Channel Dropover	7.5" x 1.6" channel / Pipe and hose crossings
ED1010	Single-Channel Dropover	4" x 1" channel / Pedestrian and light vehicle

The Elasco Products You Know. Built to the Original Specifications.

Meet Our Brand



CABLE PROTECTORS


- ➔ 25% Lighter Due to Advanced Reaction Injection Molding (RIM)
- ➔ Improved Functional Design with Snap On/Off Lid.
- ➔ Custom Colors and Logos Available Allowing for Personalization.

BULK CONTAINERS

- ➔ Holds Exactly 50 RhinoGuardTM 5-Channel Standard Ramp Cable Protectors.
- ➔ Collapses from 51" to 29.8" for Flat, Compact Storage.
- ➔ Four-Way Forklift Entry with Two Drop Doors.
- ➔ Matched Lid Included — Container and Lid Ship as One SKU.

GROUND PROTECTION MATS

- ➔ Offers General Purpose and Heavy Duty Mat Options.
- ➔ Configurable Applications with Connectors.
- ➔ Chemical, Oil, and UV Resistant.
- ➔ Dual Traction Surfaces.

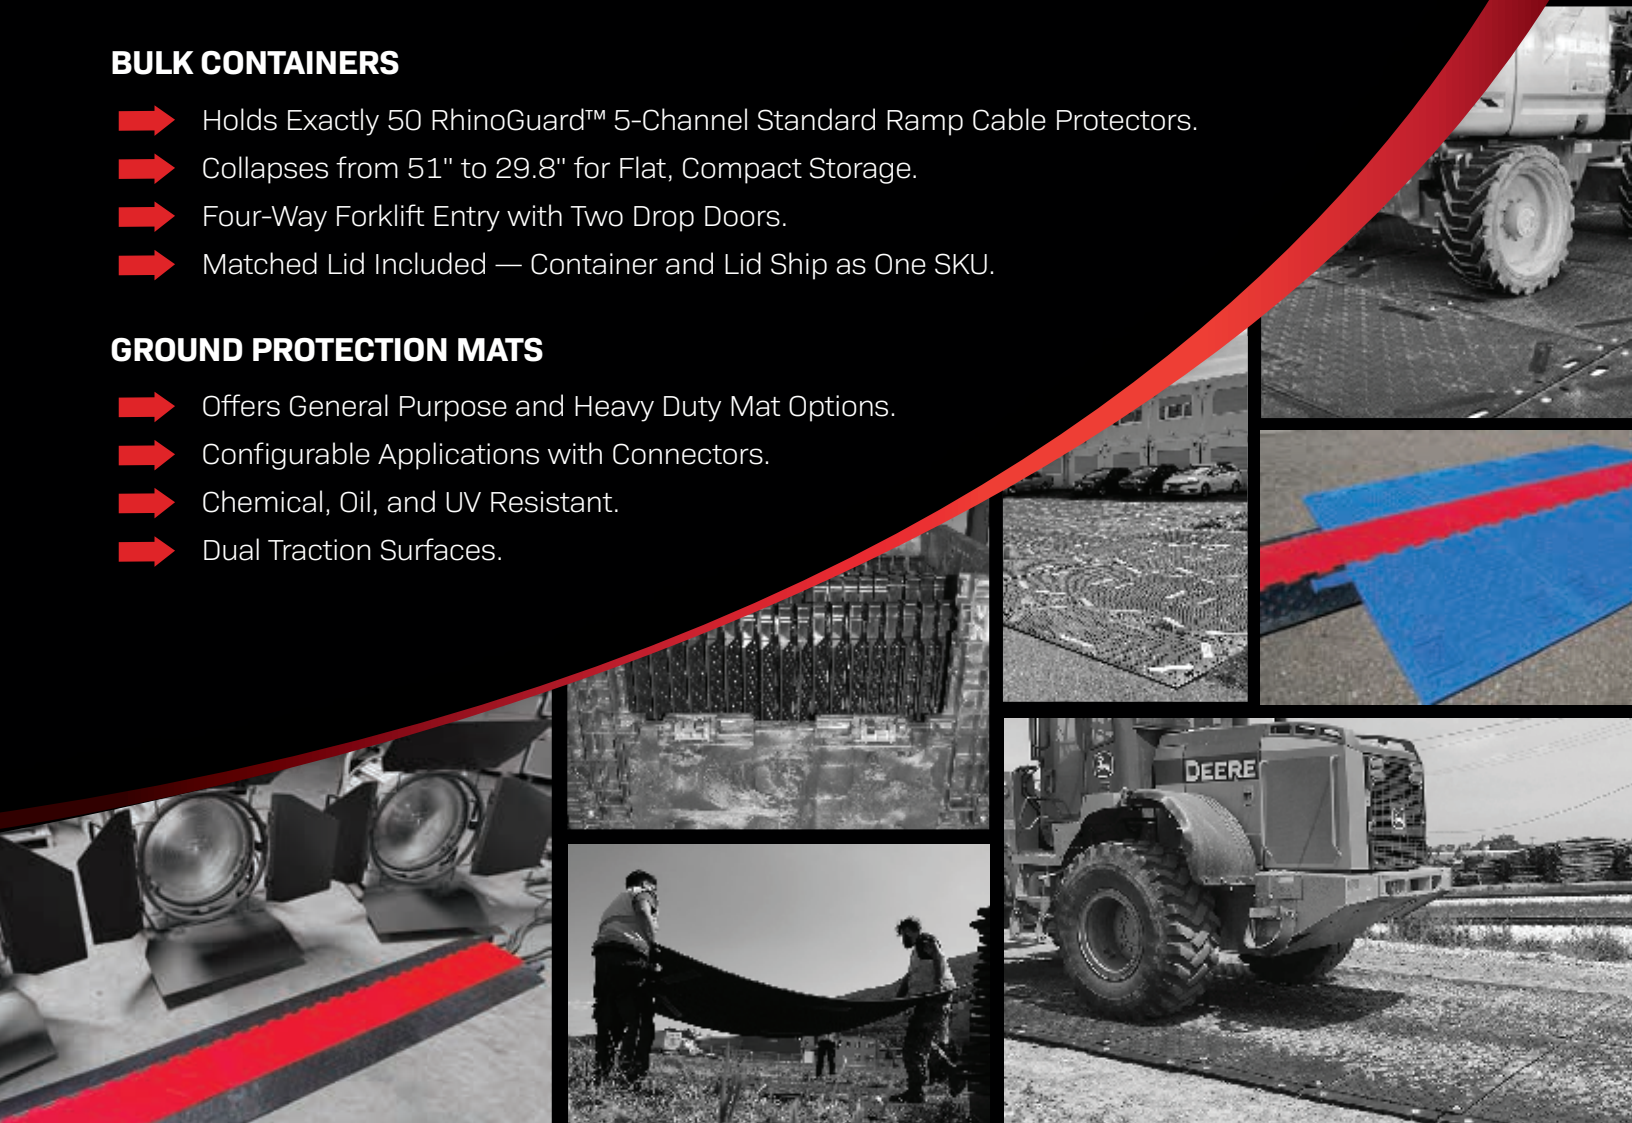


RhinoGuard™ Cable Protectors

Advanced Reaction Injection Molding (RIM) ■ 25% Lighter in Weight ■ Snap On/Off Lid ■ Customer Colors/Logos!

5-Channel Cable Protector

Introducing the **RhinoGuard™** 5-Channel Cable Protector: Built on decades of experience, expertise, and knowledge of what it takes to manufacture the best product in the market. Our cutting-edge manufacturing process means superior advantages over other cast-molded products. RhinoGuard™ is ideal for use in the Entertainment, Temp Power, O&G, Utility, Construction, and Industrial markets.

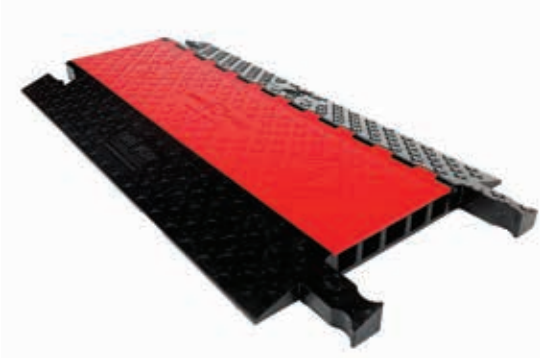


STANDARD LID OPTIONS




RG513A-RB
Red Lid/Black Base




RG513A-BB
Black Lid/Black Base

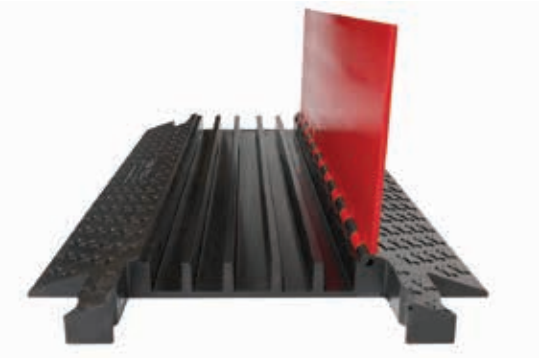


Benefits

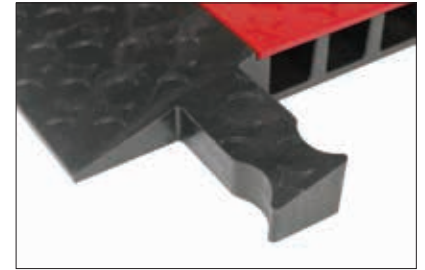

Easier to connect and disconnect compared to cast molding. No sharp edges.

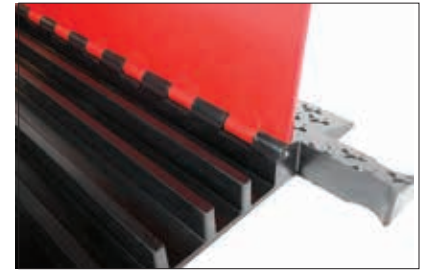

Snap on/off lid for easy field lid swapping, no fiberglass rods required. Made with the most popular connector, compatible with other brands.

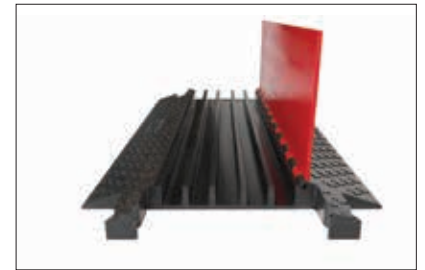


Protects cables/hoses up to 1.3" outside diameter, with a center channel accommodating up to 1.6" outside diameter.



Diamond tread pattern designed for improved traction.

Specifications

Product Attribute	Product Description
Model Numbers	RG513A-RB, RG513A-BB
Load Capacity Per Axle (lbs)	30,000
Load Capacity Per Tire (lbs)	15,000
Length (Inches)	36.0
Width (Inches)	19.8
Height (Inches)	2.0
Weight (lbs)	21.0
Max Cable Outside Diameter (Inches)	1.32, 1.6 (Center Channel)
Number of Channels	5



RhinoGuard™ Bulk Containers

Holds 50 Protectors ▪ Collapsible Design ▪ Matched Lid Included

Ramp protectors usually travel loose, stacked in a trailer, strapped to a pallet, wrapped in cardboard that gets thrown out at the next job. **RhinoGuard™ Bulk Containers** replace all of it. The **RGCRATE** holds exactly 50 **RhinoGuard™ 5-Channel Standard Ramp Cable Protectors** on a 48" x 45" pallet footprint, so there's no measuring and no trial stacking. Structural-foam HDPE walls and an injection-molded base take the impact and shifting that damage loose freight. Four-way forklift entry and two drop doors keep handling simple. Empty, the container collapses from 51 inches to under 30 and stacks flat against a wall. Container and lid ship together under one part number.

NEW!

Bulk Containers

1 Built for 50 RhinoGuard™ 5-Channel Standard Ramp Cable Protectors:

Sized and sold for a confirmed 50-unit load, not a general-purpose bin adapted to the job. No measuring, no trial stacking.

2 Collapses for Compact Storage:

Flattens from 51" to 29.8" when empty, more than 40% shorter. Stack empties flat and store them in a fraction of the floor space.



3 Matched Lid Included:

Keeps dust, debris, and weather off the protectors between jobs, and ships under the same SKU, not a separate line item to chase.



4 Structural Protection in Transit:

Structural-foam HDPE walls and an injection-molded base protect the load from impact and shifting, reducing freight damage, returns, and replacements.

5 Four-Way Forklift Entry and Drop-Door Access:

Maneuverable from any direction with the equipment you already run. Two drop doors open for direct front access, fewer steps, less lifting.

Model: RGCRATE
(Container and Lid included)

Specifications

Product Attribute	Product Description
Model Numbers	RGCRATE
Load Capacity (lbs)	2,000
Cubic Feet	47.0
Length (Inches)	48.0 (44.5 Inside)
Width (Inches)	45.0 (41.5 Inside)
Height (Inches)	51.0 (44.0 Inside)
Weight (lbs)	179.0
53' Truck Capacity - Stacked/Open	52
53' Truck Capacity - Nested/Collapsed	78



50 RhinoGuard™ 5-Channel Standard Ramp cable protectors, stood on edge and ready to pull, drop door down for straight-in access.

RhinoGuard™ Cable Protectors


Advanced Reaction Injection Molding (RIM) ▪ 25% Lighter in Weight ▪ Snap On/Off Lid ▪ Customer Colors/Logos!

ADA Ramps

RhinoGuard™ ADA Ramps are constructed from durable, all-weather polyurethane and designed with a slip-resistant surface for safe and secure passage. Integrated accessibility ramps ensure smooth transitions for both vehicles and pedestrians, eliminating the need for additional connectors. The modular, interlocking design is available in lightweight, manageable sections, making it an adaptable solution for a wide variety of applications.

Each ramp features a reinforced hinged lid for effortless cable placement, while molded-in carrying handles make transportation and setup quick and convenient. Fully compatible with all standard 5-channel RhinoGuard connectors, these ramps can be extended to any desired length without requiring specialized tools or equipment.

Customization options are available, including various color choices and embossed logos, allowing you to tailor the ramps to your specific needs and branding. RhinoGuard ADA Ramps combine versatility, durability, and safety in a user-friendly design.

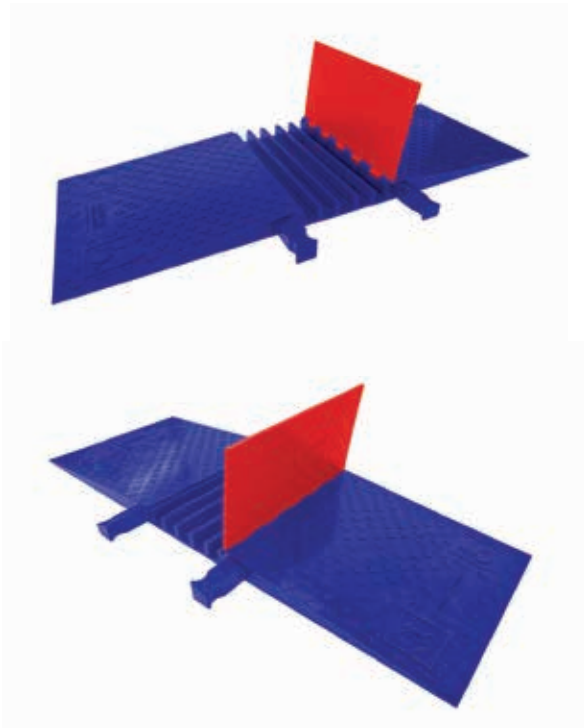

STANDARD COLOR OPTIONS

-  **RGADA513A-R/BLU**
Red Lid/Blue Base
-  **RGADA513A-B/BLU**
Black Lid/Blue Base
-  **RGADA513A-R/B**
Red Lid/Black Base
-  **RGADA513A-B/B**
Black Lid/Black Base


Specifications

Product Attribute	Product Description
Model Numbers	RGADA513A-R/BLU, RGADA513A-B/BLU, RGADA513A-R/B, RGADA513A-B/B
Load Capacity Per Axle (lbs)	30,000
Load Capacity Per Tire (lbs)	15,000
Length (Inches)	18.0
Width (Inches)	50.0
Height (Inches)	2.0
Weight (lbs)	21.0
Max Cable Outside Diameter (Inches)	1.32, 1.6 (Center Channel)
Number of Channels	5


Benefits




Easier to connect and disconnect compared to cast molding. No sharp edges.

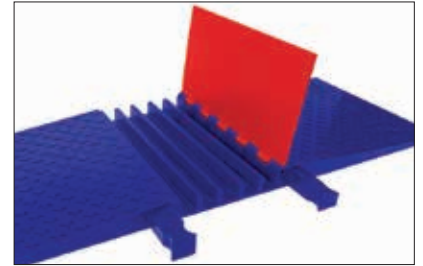

Snap on/off lid for easy field lid swapping, no fiberglass rods required. Made with the most popular connector, compatible with other brands.

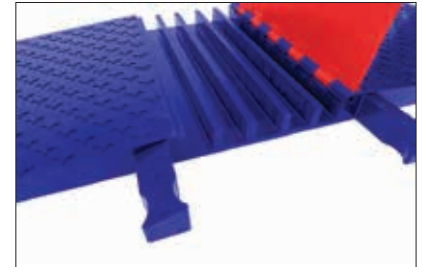

Protects cables/hoses up to 1.3" outside diameter, with a center channel accommodating up to 1.6" outside diameter.

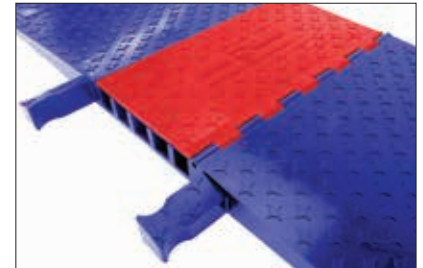

Diamond tread pattern designed for improved traction.




Compatible with all standard 5-channel RhinoGuard connectors.

RhinoGuard™ Ground Protection Mats

Easy Installation and Configurable ▪ Two Tread Patterns ▪ Portable Matting System

General Purpose Ground Protection Mats


Introducing the **RhinoGuard™** General Purpose Ground Protection Mats: the NEW durable, general purpose mat is strong enough to move vehicles and equipment across, yet man-handable for quick and easy installation. Stronger and sturdier than plywood, without rotting, becoming water logged, warped, or splintered from weather exposure. Perfect solution for temporary vehicle roadways in muddy or soft ground conditions, protecting delicate sports turf or lawn from damage, or a pedestrian walkway at construction sites, or events. Ideal for the utility, construction, landscape, oil and gas, mining, and event industries.

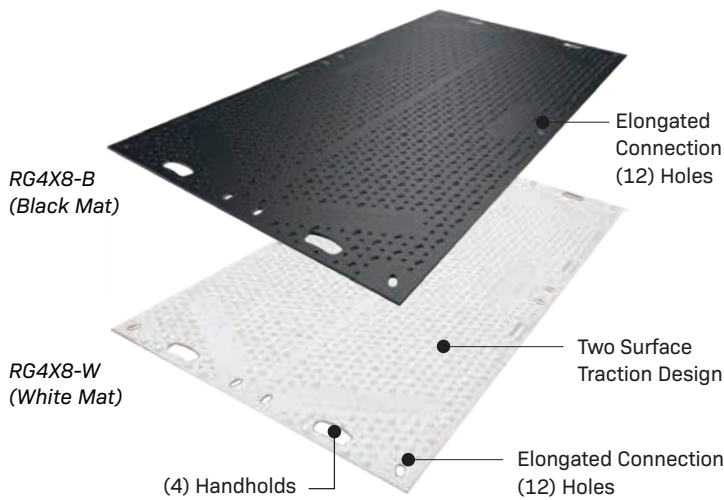

Benefits



Connectors Available
2-Way (RGC-2WAY)
4-Way (RGC-4WAY)



Two excellent traction surfaces for safe movement of vehicles and pedestrians.



Elongated connection holes with 2-Way and 4-Way connectors with unique hole design for adjustments.



Four hand cut-outs and grips for easy handling and safe lifting.

Specifications

Product Attribute	Product Description
Model Number	RG4X8-B
Color	Black
Pallet Quantity	40
Load Bearing Capacity (Tons)	120
Length (Feet)	8.0' (2410 mm)
Width (Feet)	4.0' (1200 mm)
Thickness (Inches)	0.8" (20 mm), 0.5" (12 mm) Core
Weight (lbs)	79.4 lbs (36 kg)



Mats available in white
RG4X8-W (White Mat)



12 connection holes providing options for installation configuration (M10 flange head bolts sold separately)



Protects lawn and turf from heavy equipment without leaving ruts.



Two traction surfaces keep heavy equipment moving over loose sand.



Instant access road across soft ground, no site prep.



Connectors join the mats edge to edge, so the surface holds together under traffic.

RhinoGuard™ Ground Protection Mats

Easy Installation and Configurable ▪ Two Tread Patterns ▪ Portable Matting System

Heavy Duty Ground Protection Mats

Introducing the **RhinoGuard™** Heavy Duty Ground Protection Mats: a NEW proven standard in highly portable, yet heavy duty matting solution. Thicker, stronger modular system with built-in connectors offers maximum support for any vehicle. This heavy-duty solution is the most durable and functional portable matting system for temporary access and is ideal for creating access roads, walkways, pavement protection, event flooring, parking lots, and job site compounds. The heavy-duty mat is typically used by construction sites, utilities and infrastructure, geotechnical, military, civil engineering, logistics, and rental industries.



Benefits



Thicker, stronger modular system with built in connectors.



Two tread patterns offer superior grip in all directions.



Overlapping lipped connectors offer maximum support and mud suppression.



Easily handled by two workers without lifting equipment, at 88 lbs. per mat.



Self aligning shoulder bolts per mat (sold separately).



Specifications

Product Attribute	Product Description
Model Number	RG6X3-HD-B
Color	Black
Pallet Quantity	25
Load Bearing Capacity (Tons)	130
Length (Feet)	6.0' (1829 mm)
Width (Feet)	3.0' (914 mm)
Thickness (Inches)	1.0" (25 mm)
Weight	88 lbs (40 kg)



Connectors (Flanges with Long Bolts - 6 bolts sold separately)



Overlapping lipped connectors with built-in connectors.



Mats can be locked together to form a workable platform.



Mats have a load capacity of 130 tons.

Meet Our Brand



- ➔ #1 Brand Choice for Leading Mine Sites
- ➔ Globally Recognized for LED Identification Displays
- ➔ Supporting Standard Vehicles & Heavy Equipment
- ➔ Engineered with Advanced LED Technology
- ➔ Lowest Power Consumption in the Industry
- ➔ Lightweight & Easy to Install
- ➔ Maintenance Free



LED Programmable Vehicle Identification Displays

Bright & Rugged LED Displays ▪ **Most Dependable in the Industry** ▪ **Maintenance Free** ▪ **Field Tested for Over 20 Years!**



12", VID-3N12L-G shown above

NVIZN™ LED Programmable Displays are the most efficient form of LED displays Driver Industrial Safety™ has to offer. Recognized globally for dependability, high visibility, and programmable functionality. LED Programmable displays provide the most robust and efficient solution to identify any vehicle or heavy equipment especially under extreme, low visibility weather conditions. NVIZN™ products have proven to be the most visible enabling continuous Day and Night operation on countless mine sites with the luxury of no maintenance. We offer up to (5) characters within our Single-Framed displays for users to efficiently program multiple numbers, letters, or characters and/or messages for required equipment identification. Determine your Mounting and Distance Criteria™ (DC) requirements to ensure you select the right Type, Size or a Combination of displays to safeguard workers and site management so they are easily able to identify unit number, unit status, speed limit, payload weight, or otherwise, from afar. Count on Driver Industrial Safety™ to protect your valued Personnel & Assets!

9" Numeric Displays, Programmable 0 to 9

Visible up to 350ft / 107m							Voltage from 10 to 30 VDC!		
Part Number	LED Color	3 Digit, LED Programmable							
VID-3N9-R VID-3N9-A VID-3N9-G VID-3N9-B	Red Amber Green Blue	Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
		3	228.6 mm 9 in	4.9 kg 11 lbs	346.7 mm 13.65 in	438.15 mm 17.25 in	24	0.50	12
Accessories	Mounting Brackets VID-S9-2	Power Extension Cord VID-PC-EXT-50-1		Power Cord Splitter 2 VIDs VID-PC-EXT9-2Y		Power Cord Splitter 3 VIDs VID-PC-EXT9-3Y			



VID-3N9-A



VID-2N12L-G



VID-3N12L-R



VID-4N12L-G

12" Numeric Displays, Programmable 0 to 9

Visible up to 500ft / 152m							Voltage from 10 to 30 VDC!		
Part Number	LED Color	2-4 Digits Available, LED Programmable							
VID-2N12L-R	Red	Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-2N12L-A	Amber								
VID-2N12L-G	Green								
VID-2N12L-B	Blue								
VID-3N12L-R	Red	Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-3N12L-A	Amber								
VID-3N12L-G	Green								
VID-3N12L-B	Blue								
VID-4N12L-R	Red	Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-4N12L-A	Amber								
VID-4N12L-G	Green								
VID-4N12L-B	Blue								
Accessories	Mounting Brackets		Power Extension Cord		Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs		
	VID-S12-2		VID-PC-EXT-50-1		VID-PC-EXT12-2Y		VID-PC-EXT12-3Y		

12" Character Displays, Programmable A to Z and 0 to 9


Visible up to 500ft / 152m							Voltage from 10 to 30 VDC!		
Part Number	LED Color	1 to 5 Characters Available, LED Programmable							
VID-2C12-R	Red	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-2C12-A	Amber								
VID-2C12-G	Green								
VID-2C12-B	Blue								
		2	304 mm 12 in	10.4 kg 23 lbs	438.15 mm 17.25 in	622.05 mm 24.49 in	24	1.00	24
Accessories	Mounting Brackets		Power Extension Cord		Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs		
	VID-S12-2		VID-PC-EXT-50-1		VID-PC-EXT12-2Y		VID-PC-EXT12-3Y		



VID-5C12-A



VID-3N12V-R



VID-2N12V-G



Multiple LED Color Options Available!

12" Vertical Numeric Displays, Programmable 0 to 9

Visible up to 500ft / 152m							Voltage from 10 to 30 VDC!			
Part Number		LED Color	2-4 Digits Available, LED Programmable							
VID-2N12V-R	Red	2	Character Height 304 mm 12 in	Weight 7 kg 15.5 lbs	Frame Height 812.8 mm 32.0 in	Frame Width 294.6 mm 11.60 in	Volts 24	Amps 0.33	Watts 8	
VID-2N12V-A	Amber									
VID-2N12V-G	Green									
VID-2N12V-B	Blue									
VID-3N12V-R	Red	3	Character Height 304 mm 12 in	Weight 9.3 kg 20.5 lbs	Frame Height 1171.4 mm 46.12 in	Frame Width 294.6 mm 11.60 in	Volts 24	Amps 0.49	Watts 12	
VID-3N12V-A	Amber									
VID-3N12V-G	Green									
VID-3N12V-B	Blue									
Accessories	Mounting Brackets		Power Extension Cord		Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs			
	VID-S12-2		VID-PC-EXT-50-1		VID-PC-EXT12-2Y		VID-PC-EXT12-3Y			



Two 36" character displays (VID-1C36-A) on an electric rope shovel. Visible up to 2,000 ft.



Three 36" character displays (VID-1C36-A) per haul truck. Amber LED stays legible in low light.



Three-digit 16" numeric display (VID-1C18-A) for unit identification. Visible up to 1,000 ft.

NEW! 16" Numeric Displays, Programmable 0 to 9

Visible up to 1000ft / 305m							Voltage from 10 to 30 VDC!		
Part Number	LED Color	2 or 3 Digits Available, LED Programmable							
VID-2N16L-R VID-2N16L-A VID-2N16L-G	Red Amber Green	Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
		2	406 mm 16 in	11.3 kg 25 lbs	539.8 mm 21.25 in	498.09 mm 19.61 in	24	0.57	13.7
VID-3N16L-R VID-3N16L-A VID-3N16L-G	Red Amber Green	Digits	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
		3	406 mm 16 in	11.3 kg 25 lbs	539.8 mm 21.25 in	895.4 mm 35.25 in	24	0.57	13.7
Accessories	Mounting Brackets VID-S12-2		Power Extension Cord VID-PC-EXT-50-1		Power Cord Splitter 2 VIDs VID-PC-EXT12-2Y		Power Cord Splitter 3 VIDs VID-PC-EXT12-3Y		



16" NUMERIC DISPLAYS
VISIBLE UP TO 1000FT!




18" Character Displays, Programmable A to Z and 0 to 9

Visible up to 1000ft / 300m							Voltage from 10 to 30 VDC!		
Part Number	LED Color	1 Character, LED Programmable							
VID-1C18-R	Red Amber Green Blue	Character	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-1C18-A		1	457.2 mm 18 in	7.3 kg 16 lbs	575.31 mm 22.65 in	438.15 mm 17.25 in	24	1.00	24
VID-1C18-G									
VID-1C18-B									
Accessories	Mounting Brackets VID-S18-2	Power Extension Cord VID-PC-EXT-50-1		Power Cord Splitter 2 VIDs VID-PC-EXT18/24-2Y		Power Cord Splitter 3 VIDs VID-PC-EXT18/24-3Y			

NEW!




VID-2N16L-A




VID-1C18-G

27" Character Displays, Programmable A to Z and 0 to 9

Visible up to 1500ft / 457m							Voltage from 10 to 30 VDC!		
Part Number		LED Color		1 Character, LED Programmable					
VID-1C24-R	Red Amber Green Blue	Character	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-1C24-A			609.6 mm	9.5 kg	803.91 mm	438.15 mm	24	1.50	36
VID-1C24-G			27 in	21 lbs	31.65 in	17.25 in			
VID-1C24-B									
Accessories		Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs			
		VID-S24-2	VID-PC-EXT-50-1	VID-PC-EXT18/24-2Y		VID-PC-EXT18/24-3Y			



VID-1C24-A



VID-1C36-B

36" Character Displays, Programmable A to Z and 0 to 9

Visible up to 2000ft / 610m							Voltage from 10 to 30 VDC!		
Part Number		LED Color		1 Character, LED Programmable					
VID-1C36-R	Red Amber Green Blue	Character 1	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-1C36-A			914.4 mm 36 in	12.2 kg 27 lbs	1032.51 mm 40.65 in	438.15 mm 17.25 in	24	2.50	60
VID-1C36-G									
VID-1C36-B									
Accessories		Mounting Brackets	Power Extension Cord		Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs		
		VID-S36-2	VID-PC-EXT-50-1		VID-PC-EXT36-2Y		VID-PC-EXT36-3Y		

For Display Accessories (Refer to Page 19)

VISIBLE UP TO 2000ft/610m!



Multiple LED Color Options Available!

Payload Displays

Assists both Digger and Loader Operators! Displays are mounted to the Haul Truck, in view of operator, displaying "Real Time" Payload weights as materials are being loaded onto a Dump Truck.

NEW!



VID-PYLD-R
with remote
(VID-PYLD-Communication Module)

A B G R : Multiple LED Color Options Available!

Additional Features:

- Displays Vehicle's Speedometer
- Displays Truck #
- Flashes when Truck is overloaded



IP RATED
IP66/IP67

**VISIBLE UP TO
500ft/152m!**

LED Message Board Displays

LED Message Board Displays exceed expectations with their advanced communication capabilities. These smart displays seamlessly connect to your software, device, or vehicle, enabling features like payload display for shovel operators, vehicle speed limits, low battery alerts, truck wash bay signals, and more. Pre-programmed to show equipment status, traffic guidance arrows, and various communication needs.



VID-3C12-MBCA-A
(without remote)

Additional Features:

- Custom Programming
- Sealed System Display for Protection
- Real-Time Programming Capability
- External Waterproof Pigtail
- Message Vehicle Number Lock
- Easy Touch-Screen Controls



*Identifies Equipment that is
Down or Needs Assistance*



VID-3C12-MBCA-A-KIT
(with remote)

Up to 3 Characters - 17.25"H (438.15mm) x 35.25"L (895.35mm)
12V to 24V | 25.5lbs (11.6kg) | 36 Watts

A B G R : Multiple LED Color Options Available!



VID-M3XCR
(Also Sold Separately)

IP RATED
IP66/IP67

**VISIBLE UP TO
500ft/152m!**

LED Signal Light Displays: Advanced LED Backlit Technology

Signal Light displays serve as signaling devices for various operational modes and directional guidance. They use color signals like "Red Light, Green Light" to indicate equipment use, vehicle direction, or personnel movement. These lights help manage site traffic, show forward and reverse modes, or denote autonomous vs. manual operation, ensuring clear communication and safety on site.

NEW!



VID-BL3SIG6-RAG-KIT
(signal light display with remote)



VID-BLSIG6-24V-RG-KIT
(signal light display with remote)



Additional Features:

- Available in 110V & 220V upon request (refer to factory for wire hireness)
- Operating Temperatures ranging from 50°C (-58°F) to +60°C (140°F)
- Dimensions: 11"H (279.40mm) x 35.37"L (898.40mm)
- 12V (1.20Amps) to 24V (.60Amps) | 15lbs (6.80kg) | 14.40 Watts

A B W G R : 2 or 3 Color Combinations Available!



IP RATED
IP66/IP67

**VISIBLE UP TO
2000ft/610m!**



Signal Light (VID-BLSIG6-24V-RG-KIT)
mounted on rear of haul truck.



Signal Light (VID-BLSIG6-24V-RG-KIT)
mounted on front of haul truck.

LED Reflective Backlit Vehicle Identification Displays

Bright & Rugged LED Displays ▪ **Most Dependable in the Industry** ▪ **Maintenance Free** ▪ **Field Tested for Over 20 Years!**

LED Reflective Backlit Displays are a solid solution for 24hr Equipment Visibility. NVIZN™ Backlit Displays are rugged, super-sealed and engineered with customizable 3M™ Diamond Grade™ reflective Unit Numbers or Message to ensure maximum visibility both day and night whether your vehicle (and display) are powered on or off. Depend on Driver Industrial Safety's NVIZN™ products for reliable equipment management solutions!

DESIGNED
FOR 24 HOUR
USE!



Multiple Reflective Color Options Available!

9" Character - Visible up to 350ft / 107m

Part Number LED Color		2 to 4 Character, LED Reflective Backlit				12 Volt Available Upon Request			
VID-BL3C9-24V-BKA	Amber Yellow Green White	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL3C9-24V-BKY		2 to 4	228.8 mm 9 in	4.90 kg 11 lbs	346.70 mm 13.65 in	438.15 mm 17.25 in	24	0.50	12
VID-BL3C9-24V-BKW									
Accessories	Mounting Brackets	Power Extension Cord	Power Cord Splitter 2 VIDs	Power Cord Splitter 3 VIDs					
	VID-S9-2	VID-PC-EXT-50-1	VID-PC-EXT9-2Y	VID-PC-EXT9-3Y					



VID-BL1C18-24V-BKA
(3) Single Frames -18" Fluorescent Amber
Reflective Characters

12" Character - Visible up to 500ft / 152m

Part Number LED Color		2 to 4 Character, LED Reflective Backlit				12 Volt Available Upon Request			
VID-BL3C12-24V-BKA	Amber Yellow Green White	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL3C12-24V-BKY		2 to 4	304.0 mm 12 in	11.34 kg 25 lbs	346.70 mm 13.65 in	654.05 mm 25.75 in	24	3.75	90
VID-BL3C12-24V-BKW									
Accessories	Mounting Brackets	Power Extension Cord		Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs			
	VID-S12-2	VID-PC-EXT-50-1		VID-PC-EXT12-2Y		VID-PC-EXT12-3Y			

VID-BL3C12-24V-BKA
Reflective Fluorescent
Amber Characters



16" Character - Visible up to 750ft / 230m

Part Number LED Color		2 to 4 Character, LED Reflective Backlit				12 Volt Available Upon Request			
VID-BL3C16-24V-BKA	Amber Yellow Green White	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watt
VID-BL3C16-24V-BKY		2 to 4	406.4 mm 16 in	16.33 kg 36 lbs	539.75 mm 21.25 in	895.35 mm 35.25 in	24	5.63	135
VID-BL3C16-24V-BKW									
Accessories	Mounting Brackets	Power Extension Cord		Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs			
	VID-S16-2	VID-PC-EXT-50-1		VID-PC-EXT16-2Y		VID-PC-EXT16-3Y			



VID-BL3C16-24V-BKY
Reflective Fluorescent
Yellow Green
Characters

18" Character - Visible up to 1000ft / 300m


Part Number LED Color		1 Character, LED Reflective Backlit				12 Volt Available Upon Request			
VID-BL1C18-24V-BKA	Amber Yellow Green White	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C18-24V-BKY		1	457.20 mm 18 in	7.30 kg 16 lbs	575.31 mm 22.65 in	438.15 mm 17.25 in	24	1.00	24
VID-BL1C18-24V-BKW									
Accessories	Mounting Brackets	Power Extension Cord		Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs			
	VID-S18-2	VID-PC-EXT-50-1		VID-PC-EXT18-2Y		VID-PC-EXT18-3Y			

VID-BL1C18-24V-BKA
Reflective Fluorescent
Amber Character



27" Character - Visible up to 1500ft / 457m

Part Number LED Color		1 Character, LED Reflective Backlit				12 Volt Available Upon Request			
VID-BL1C24-24V-BKA	Amber Yellow Green White	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C24-24V-BKY		1	685.80 mm 27 in	9.50 kg 21 lbs	803.91 mm 31.65 in	438.15 mm 17.25 in	24	1.50	36
VID-BL1C24-24V-BKW									
Accessories	Mounting Brackets	Power Extension Cord		Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs			
	VID-S24-2	VID-PC-EXT-50-1		VID-PC-EXT24-2Y		VID-PC-EXT24-3Y			



VID-BL1C24-24V-BKY
Reflective Fluorescent
Yellow Green
Character

36" Character - Visible up to 2000ft / 610m

Part Number LED Color		1 Character, LED Reflective Backlit				12 Volt Available Upon Request			
VID-BL1C36-24V-BKA	Amber Yellow Green White	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C36-24V-BKY		1	914.40 mm 36 in	12.70 kg 28 lbs	1032.51 mm 40.65 in	438.15 mm 17.25 in	24	4.17	100
VID-BL1C36-24V-BKW									
Accessories	Mounting Brackets	Power Extension Cord		Power Cord Splitter 2 VIDs			Power Cord Splitter 3 VIDs		
	VID-S36-2	VID-PC-EXT-50-1		VID-PC-EXT36-2Y			VID-PC-EXT36-3Y		

VID-BL1C36-24V-BKA
Reflective Fluorescent
Amber Character



NEW! 56" Character - Visible up to 2500ft / 762m

Part Number LED Color		1 Character, LED Reflective Backlit				12 Volt Available Upon Request			
VID-BL1C56-24V-BKA	Amber Yellow Green White	Characters	Character Height	Weight	Frame Height	Frame Width	Volts	Amps	Watts
VID-BL1C56-24V-BKY		1	1422.4 mm 56 in	24.50 kg 54 lbs	1541.80 mm 60.70 in	439.40 mm 17.30 in	24	6.38	153
VID-BL1C56-24V-BKW									
Accessories	Mounting Brackets	Power Extension Cord		Power Cord Splitter 2 VIDs		Power Cord Splitter 3 VIDs			
	VID-S36-2	VID-PC-EXT-50-1		VID-PC-EXT56-2Y		VID-PC-EXT56-3Y			

**VISIBLE UP TO
2000ft/610m!**

For Display Accessories
(Refer to Page 19)

12" & 16" INTERCHANGEABLE DISPLAYS!
LED Reflective Backlit Displays - same build as our standard
displays, constructed with the same super-sealed frame!

(For Product Details, Refer to Page 19)

Featured NVIZN™ Products: Custom Identification Displays

Bright & Rugged LED Displays ▪    Various 3M™ Reflective Color Options ▪ Easy to Install & Maintenance Free!

Interchangeable Character Reflective Backlits

5 YEAR
LIMITED
WARRANTY



VID-BLE3C16-BKY
(with Fluorescent Yellow Green Characters)

Purchase Your Custom Number Kit TODAY!

*Combination Letter Kits Available Upon Request



All Parts are Interchangeable & Easy to Install!

- ▶ 2 to 4 Character 16" LED, Reflective Backlit
- ▶ 2 to 4 Positions for Interchangeable Characters
- ▶ Advanced Backlit Technology for Max Visibility
 - ▶ Advanced Temperature Control LEDs - (Shock and Vibration Resistant)
- ▶ 3M™ Diamond Grade™ Reflective Characters
- ▶ Reverse Polarity Protected
- ▶ Built to Survive Extreme Environments
 - ▶ Black Aerospace-Grade Aluminum Frame
 - ▶ Impact Resistance and Sealed Lens
 - ▶ Withstands Power-Hose Cleaning
- ▶ Lightweight and Easy to Install!
- ▶ Available in 110VAC & 220VAC
- ▶ Rated IP66 & IP67
- ▶ Standard Reflective Color Options
 - ▶ Fluorescent Yellow Green (Y)
 - ▶ Fluorescent Amber (A)
 - ▶ Fluorescent White (W)
- ▶ Visible up to 750ft (230m)!

Part Number	Character Height	Weight	Frame Dimensions		Volts (VDC)	Amps	Watts
			Height	Width			
VID-BLE3C16-24V-BKx (2 to 4 characters) x = reflective color	16" 406.40 mm	36 lbs 16.33 kg	21.25"	35.25"	12	11.25	135
			539.75 mm	895.35 mm	24	5.63	135

3-Sided LED Reflective Backlits

1 YEAR
LIMITED
WARRANTY

Light Duty (For Pick-up Trucks or Passenger Vehicles)



VID-SA
(shown above with LED Beacon)



(3) Heavy Duty Magnetic Feet with Cigarette Cord

- ▶ Internal High Performance Illumination with Backlit Technology and 3M™ Diamond Grade™ Reflective material for Day & Night Visibility!
- ▶ Up to (4) Character & Numeric Options
- ▶ High-illumination with standard powered 12VDC Cigarette Cord. Powered & Non-powered Options!
- ▶ Heavy Duty Ultra-High Density shell providing resistance towards water and extreme weather!
- ▶ Constructed with (3) Heavy Duty Magnets withstanding speeds of up to 50 MPH (80km/hr)
- ▶ Lightweight & Easy to Install, No Maintenance!

Also Available with or without a Whip and/or Beacon!



VID-S



UPM3-TMVSA (with VID-SA)

Part Number	Character Height	Weight	Frame Dimensions		Volts (VDC)	Amps	Watts
			Height	Width			
VID-S (2 to 4 character)	7.25" 184.15 mm	6 lbs 2.72 kg	8.00"	20"x20"x20"	12	.156	1.87
			203.20 mm	508.00 mm	24	.078	1.87

Super Duty (For Auxiliary Equipment Identification)



12" H characters

- ▶ Consists of (3) NVIZN™ displays mounted on a 3-Sided, Super Duty frame structure for clear visibility at multiple angles Day and Night!
- ▶ 3M™ Diamond Grade™ Reflective Characters
- ▶ Advanced Backlit Technology for Max Visibility
 - ▶ Advanced Temperature Control LEDs - (Shock and Vibration Resistant)
- ▶ Open-Framed structure built to survive the most Extreme Environmental Conditions!
 - ▶ Black Aerospace Grade Aluminum Sign Frame
 - ▶ Impact Resistance and Sealed Lens
 - ▶ Withstands Power-Hose Cleaning
- ▶ Reverse Polarity Protected
- ▶ Visible up to 500ft (152m)!

Frame also Compatible with LED Programmable Displays!

LED Color Options:  Red  Amber  Green  Blue

5 YEAR
LIMITED
WARRANTY

Part Number	Character Height	Weight	Frame Dimensions		Volts (VDC)	Amps	Watts
			Height	Width			
VID-3SBL3N12CS-x (Up to 4 characters) x = reflective color	12" 304.80 mm	110 lbs 49.90 kg	24.61"	32.38"	12	22.60	270
			625.10 mm	822.45 mm	24	11.30	270

Medium Duty (For Auxiliary Equipment)



VID-LA
(shown above with LED Beacon)



- ▶ Manufactured with 3M™ Diamond Grade™ Reflective material for Clear Nighttime Visibility when equipment is turned off!
- ▶ Up to (4) 10" Character & Numeric Options
- ▶ High-illumination with standard powered 12VDC Cigarette Cord. Powered & Non-powered Options!
- ▶ Heavy Duty Ultra-High Density shell providing resistance towards water and extreme weather!
- ▶ Constructed with (4) Heavy Duty Magnets with up to 600 lbs (272.15kg) of magnetic pull!
- ▶ No Maintenance & Easy to Install!


Also Available with or without a Whip and/or Beacon!

(4) Heavy Duty Magnetic Feet with Cigarette Cord

1 YEAR
LIMITED
WARRANTY

Part Number	Character Height	Weight	Frame Dimensions		Volts (VDC)	Amps	Watts
			Height	Width			
VID-L (2 to 4 character)	10.0" 254 mm	20 lbs 9.07 kg	12.00"	28"x28"x28"	12	.156	1.87
			304.8 mm	28" (711 mm)	24	.078	1.87

NVIZN™ Display Accessories



Mounting Brackets, Communication Cables, Power Supply & Converters, Power Cords, Power Harnesses, and much more!

We supply high quality Mounting Hardware and Communication Accessories for your NVIZN™ Identification Display. Multiple sizes, lengths and customizable options are readily available to maximize the performance of your display. Purchase yours today!



VID-S12-2

Steel Mounting Bracket Set (includes Hardware)



VID-110-240V PS

Power Supply, 2 Pin Male Deutsch (277 Vac to 24Vdc)



VID-PC12-50-1
50 ft Power Cord Extension, 12 Gauge, 2-Wire with Deutsch Connector



VID-PC16-50-1
50 ft Power Cord Extension, 16 Gauge, 2-Wire with Deutsch Connector



VID-PC14-25-2
25 ft Power Cord Extension, 14 gauge, with Deutsch Connector on both ends

Universal Platform Mounting Systems

Complete Customizable Mounting Systems for Alternative Mounting Locations, Maximizing Vehicle & Equipment Visibility!

Driver Industrial Safety™ strives for the best possible safety solutions to maximize safe site operations globally. We are constantly driving our product ideation towards improving Vehicle and Equipment visibility standards. Our SafetyWhips® Universal Platform Mounting Systems epitomize innovation by supplying your team with alternative mounting solutions for multiple standard communication devices on any type of vehicle or equipment. These mounting systems are high-strength and extremely durable; constructed of a powder-coated Steel Platform surface (for magnetic devices) and various mounting holes to securely attach all basic Safety and Communication Devices directly to the platform. Customers with non-magnetic vehicles and equipment find this solution most beneficial with it's versatility; can be installed within a vehicle's hitch (with a SafetyWhips® Hitch Mount) or mounted on the rear of a toolbox. Mounting these units are very easy and perfect for temporary use. Your outfitting possibilities are endless as we offer full customization opportunities per jobsite protocol. Simply add one of our custom NVIZN™ 3-Sided Light Duty Identification Displays, a Helios Warning Lights® heavy duty LED Beacon, then top off with a SafetyWhips® Heavy Duty Whip (up to 12ft). All mounted atop a 3ft or 5ft heavy duty pole for a completed system. Depend on Driver for your jobsite safety solutions!



Aluminum-Bodied Vehicles have found their match with our Universal Platform Mount Systems!

Powered & Non-Powered Options Available



Product Part # Matrix									
	UPM	5	NP	-	QD	V	SA	-	SDL
Pole Length		←							←
3 (3' Pole)									
5 (5' Pole)									
Power Type?			←						
NP Only use if not powered									
Mount Type					←				
NM (No Mount)									
TM (Threaded Mount)									
QD (Quick Disconnect)									
						←			
							Strobe Type		
							SA Strobe Amber		
							SG Strobe Green		
									SDL?
									SDL Only include with SDL
							</		

UPM3-TMVSA

3ft (.91m) Pole with Triangle Plate Shown mounted with UPMT on toolbox with 3ft (.91m) SafetyWhips® Heavy Duty Whip, NVIZN® 3-Sided Light Duty Identification Display, & HELIOS Warning Lights® X-MOD Amber LED Beacon

Toolbox / Side Wall Mount & Hitch Mounts all sold separately


UPM5-TMVSA

5ft (1.52m) Pole with Triangle Plate Shown mounted with 3ft (.91m) SafetyWhips® Heavy Duty Whip, NVIZN® 3-Sided Light Duty Identification Display, & HELIOS Warning Lights® X-MOD Amber LED Beacon

* For use with 5ft (1.52m) Poles Only

All Systems include Pole, Triangle Plate & External Waterproof Connector!

Recommended Hitch Mounts & Replacement Parts



UPMT
Heavy Duty Side Mount with Quick Pin. Bolt to toolbox or other sturdy parts of vehicle.



HM-B/U Alarm
107db Backup Alarm
12V to 24V



HM-Pin with Cotter Pin
5/8" x 3" Hitch Mount Pin with Cotter Pin. Fits all Hitch Mounts.



HM-Trailer Plug
Trailer End plug with 7-Way plastic connector



HMTD*
Telescoping Base, includes 7-Way Plug Powered with Deutsch Connector.
(Non-powered, Part #: HMTNP)



HMTDA*
Telescoping Base, includes 7-Way Plug, built-in 107db Backup Alarm. Powered with Deutsch Connector.
(Non-powered, Part #: HMTNPA)



HMLTD*
Telescoping Base, Includes 7-Way Plug. Powered with Deutsch Connector
(Non-powered, Part #: HMLTNP)



HMLTDA*
Telescoping Base, Includes 7-Way Plug and built-in 107db Backup Alarm. Powered with Deutsch Connector
(Non-powered, Part #: HMLTNP)

Meet Our Brand



- ➔ Largest Selection of Wheel Chock Solutions for Various Industries
- ➔ Most Dependable Wheel Chocks in the Industry
- ➔ Field Tested for over 10 Years under Harsh Environments
- ➔ 3rd-Party Tested to Meet Compliance Standards
- ➔ Resistant to Oils, Fuels & Solvents
- ➔ Tough Urethane Construction



Heavy Duty Wheel Chocks

Most Dependable in the Industry ■ Tough Urethane Construction ■ Field Tested for Over 10 Years!

We pride ourselves with the precision and rugged construction of our TORO® products. TORO® Wheel Chocks surpass quality standards and are all manufactured in the USA. Driver Industrial Safety™ hit the mark with its TORO® product lines; leading the industry in reliable and dependable chocking solutions for any type of vehicle or heavy equipment. TORO® chocks comply with multiple industry safety requirements including MSHA (Mine Safety and Health Administration), OSHA (Occupational Safety and Health Administration), NFPA (National Fire Protection Agency), DOT (Department of Transportation), SAE (Society of Automotive Engineers), and ANSI (American National Standards Institute) standards. We offer a variety of wheel chock structure styles to serve specific industry needs as well as ANSI compliant safety color and custom color options (General Purpose chocks only) for added support in providing safe and creative site-management solutions to ensure a safe working environment at all times.

Our General Purpose line of TORO® wheel chocks are engineered for quick and secure installation typically used for Land Vehicles such as trailers, pickups, utility vehicles, dual axle vehicles, and other standard size vehicles. Constructed with tough Urethane for lightweight and easy mobility, high visibility ANSI compliant safety colors and holes for mounting with rope, chains, or mounting brackets. All model styles are 3rd-party tested for compliance and support GVW's (Maximum Gross Vehicle Operating Weight) ranging from 15 Ton (30,000lbs or 13,607.77kg) to 40 Ton (80,000lbs or 36,287.39kg).

Our Heavy Equipment line of TORO® wheel chocks are heavy duty and engineered to safely secure Heavy Equipment Vehicles such as haul trucks, loaders, cranes, fire department vehicles, large military trucks, and heavy underground mining vehicles. Constructed with tough Urethane for lightweight and easy mobility with built-in strong carrying handle on the back side of each wheel chock. These large chocks are highly visible (ANSI compliant safety colors) with user-friendly mounting bracket options for quick and secure loading on the vehicle. All model styles are 3rd-party tested for compliance and support Maximum Payload Capacities ranging from 40 Ton (80,000lbs or 36,287.39kg) to 400 Ton (1,600,000lbs or 362,873.90kg).



WC-UY700

70 Ton TORO® wheel chocks
(shown on a heavy equipment loader)

TORO® Wheel Chocks "User Safety" &
"Proper Chocking Procedures" Guides
available upon request!


PROPER CHOCKING



ATTENTION! Wheel Chock Users...



IMPORTANT SAFETY WARNINGS AND INSTRUCTIONS: Wheel chocks are extremely effective safety tools providing optimum security when used correctly. Users must comply with all warnings, guidelines and instructions provided with each TORO® product. Wheel chocks **MUST BE** used in pairs, positioned downhill firmly against the tire and below the truck's center of gravity. Meaning, place a chock in front of both front tires if the truck is disabled and traveling down a grade, and in traveling up a grade while disabled place a chock in back of both rear tires of the truck. If the direction of the grade cannot be determined chock the front and back of one wheel. In severe conditions, it's necessary to use multiple pairs of chocks. Wheel chocks **MUST BE** positioned firmly and squarely against the center of the tire tread. If not properly positioned, the wheel chock will not be effective to it's expected potential. These are generally accepted chocking procedures, and it is the responsibility of the end user to make the final determination of how the vehicle should properly be chocked based on the provided circumstances. Our main goal is to inform and educate users on how to properly use our TORO® wheel chocks. Testing & qualification is required for individual vehicles and for correct product selection to meet site requirements. Many factors **MUST BE** considered before selecting and using our wheel chocks. Advised Gross Vehicle Operating Weight (GVW) is a guide only. This will vary due to environmental factors. Please complete an adequate risk assessment before using the chocks. **DO NOT** use chocks if chocks are damaged. Perform regular inspections looking for cracking, chipping, and any other noticeable concerning physical malfunctions.



**POSITION CHOCK TIGHTLY
AGAINST TIRE TREAD**



3 TIRE SIZE

IDENTIFY the tire diameter of the vehicle to select the correct wheel chock needed.

1 GROSS VEHICLE OPERATING WEIGHT

MUST understand the GVW of the vehicle to determine the necessary wheel chock for your specific requirements.

2 MAXIMUM LOAD CAPACITY

Based per chock. Each chock is designed to handle a certain amount of Tonnage. **MINIMUM** of (2) chocks required per vehicle.

4 GROUND SURFACE

BE AWARE of the environmental conditions and ground surface the tires are exposed to.

Wheel Chock Accessories

Mounting Brackets: For General Purpose Wheel Chocks

Heavy Duty Vertical Wheel Chock Mounting Unit



Heavy Duty Vertical Mounting Brackets for the General Purpose Wheel Chocks

Part Number	WC-BKT6.5		WC-BKT4
Fits Wheel Chock Models	WC-U0650	WC-U0600	WC-U0400
Max. Payload Capacity	35 Ton	25 Ton	15 Ton
Maximum GVW	70,000 lbs (31,751kg)	52,000 lbs (23,587kg)	30,000 lbs (13,608kg)
Height	1.75" (4.45 cm)	1.58" (4.01 cm)	
Width	11.63" (29.54 cm)	9.94" (25.28 cm)	
Length	11.56" (29.36 cm)	8.56" (21.74 cm)	
Weight	2.80 lbs (1.27 kg)	1.90 lbs (0.86 kg)	

Mounting Hardware NOT Included!

- Vertical orientation for quick removal and return of wheel chocks
- Constructed with heavy duty 16 gauge stainless steel material for extended durability
- (2) brackets needed for roped models: WC-U0400-2R, WC-U0600-2R, WC-U0650-2R

Testing and qualification is required for individual vehicles for correct product selection to meet site requirements

Advised GVW is a guide only. This will vary due to environmental factors. Please complete an adequate risk assessment before using chocks. Do not use chocks if they are damaged.

Replacement Rubber Pad / Aluminum Cleat: For WC-UY720 and WC-UY730 Chocks Only



Slip-Resistant, Rubber Traction Pad

(2) Required Per Chock



Part #: WC-RP-720/WC-RP-730
(1) Replacement Rubber Pad



Heavy Duty Aluminum Cleat


(2) Required Per Chock



Part #: WC-Cleat-720/WC-Cleat-730
(1) Replacement Aluminum Cleat



Toro WC-UY720 Model
Standard with (2) Rubber Pads




Toro WC-UY720-AC Model
Standard with (2) Aluminum Cleats

General Purpose Wheel Chocks

Most Dependable in the Industry ▪ Tough Urethane Construction ▪ Field Tested for Over 10 Years!



PRODUCT Part #	TIRE SIZE (up to)	DIMENSIONS L x W x H		WEIGHT (lbs/kg)	MAX. GVW (Maximum Gross Vehicle Operating Weight)
 WC-U0400*	35"	L	8.5" (21.6 cm)	2.2 lbs (1.0 kg)	15 Ton 30,000 lbs (13,607.8 kg)
		W	7.3" (18.4 cm)		
		H	6.9" (17.5 cm)		
 WC-U0450*	35"	L	11.0" (27.9 cm)	4.5 lbs (2.0 kg)	20 Ton 40,000 lbs (18,143.7 kg)
		W	7.7" (19.6 cm)		
		H	8.3" (21.0 cm)		
 WC-U0500*	32"	L	10.0" (25.4 cm)	4.5 lbs (2.0 kg)	15 Ton 30,000 lbs (13,607.8 kg)
		W	8.5" (21.6 cm)		
		H	5.3" (13.5 cm)		
 WC-U0600*	46"	L	11.5" (29.2 cm)	4.5 lbs (2.0 kg)	25 Ton 50,000 lbs (22,679.6 kg)
		W	9.0" (22.9 cm)		
		H	8.8" (22.2 cm)		
 WC-U0650*	46"	L	11.5" (29.2 cm)	6 lbs (2.7 kg)	35 Ton 70,000 lbs (31,751.4 kg)
		W	9.0" (22.9 cm)		
		H	8.8" (22.2 cm)		

* minimum of (2) chocks required

Mounting Brackets available for select Wheel Chocks (Refer to Page 23)

Testing and qualification is required for individual vehicles for correct product selection to meet site requirements

Advised GVW is a guide only. This will vary due to environmental factors. Please complete an adequate risk assessment before using chocks. Do not use chocks if they are damaged.

Rubber Wheel Chocks

 WC-RB100 Set with Rope	N/A	L	9.3" (23.6 cm)	9 lbs (4.1 kg)	N/A
		W	7.5" (19.1 cm)		
		H	5.6" (14.2 cm)		
 WC-1100BY-R2 Set with Rope	N/A	L	8.0" (20.3 cm)	8 lbs (3.64 kg)	N/A
		W	4.0" (10.2 cm)		
		H	4.0" (10.2 cm)		

Heavy Equipment Wheel Chocks

Most Dependable in the Industry ▪ Tough HDPE Construction ▪ Field Tested for Over 10 Years!



PRODUCT Part #	TIRE SIZE (up to)	DIMENSIONS L x W x H		WEIGHT (lbs/kg)	MAX. PAYLOAD CAPACITY	MAX. GVW (Maximum Gross Vehicle Operating Weight)
 WC-U0700*	65" (165.1 cm)	L	17.5" (44.5 cm)	27 lbs (12.2 kg)	70 Ton (63,503.0 kg)	245,000 lbs (111,130.0 kg)
		W	15.0" (38.1 cm)			
		H	15.0" (38.1 cm)			
 WC-UY710*	65" (165.1 cm)	L	15.0" (38.1 cm)	14.3 lbs (6.5 kg)	70 Ton (63,503.0 kg)	245,000 lbs (111,130.0 kg)
		W	15.0" (38.1 cm)			
		H	11.0" (27.9 cm)			
 WC-UY720*	38" (96.5 cm)	L	15.8" (40.0 cm)	7.6 lbs (3.4 kg)	40 Ton (36,287.4 kg)	80,000 lbs (36,287.4 kg)
		W	8.5" (21.6 cm)			
		H	8.5" (21.6 cm)			
 WC-UY730*	46" (116.8 cm)	L	21.0" (53.3 cm)	16.1 lbs (7.3 kg)	75 Ton (68,038.8 kg)	150,000 lbs (68,038.8 kg)
		W	11.3" (28.6 cm)			
		H	12.3" (31.1 cm)			
 WC-UY750*	105" (266.7 cm)	L	18.0" (45.7 cm)	19 lbs (8.6 kg)	165 Ton (149,685.5 kg)	550,000 lbs (249,475.6 kg)
		W	14.5" (36.8 cm)			
		H	10.0" (25.4 cm)			
 WC-UY810*	142" (360.7 cm)	L	22.0" (55.9 cm)	24 lbs (10.9 kg)	255 Ton (231,332.2 kg)	855,000 lbs (387,821.2 kg)
		W	15.0" (38.1 cm)			
		H	10.5" (26.7 cm)			
 WC-UY910**	165" (419.17 cm)	L	24.5" (62.2 cm)	32 lbs (14.5 kg)	400 Ton (362,874.0 kg)	1,600,000 lbs (725,747.2 kg)
		W	13.5" (34.3 cm)			
		H	16.0" (40.6 cm)			

Testing and qualification is required for individual vehicles for correct product selection to meet site requirements

Advised GVW is a guide only. This will vary due to environmental factors. Please complete an adequate risk assessment before using chocks. Do not use chocks if they are damaged.

* Minimum of (2) chocks required

** Minimum of (4) chocks required

Safety Whips[®] USA


- ➡ Your Leading Safety Whip Manufacturer!
- ➡ Field-Proven for over 20 Years
- ➡ Most Dependable & Visible Whips in the Industry
- ➡ Various Safety Driven Whip Solutions for Harsh Environments
- ➡ Advanced LED Light Technology
- ➡ Premium UV Protected Fiberglass
- ➡ Customizable Whip Assemblies



Complete Warning Whip & Safety Solutions

Leading Safety Whip Manufacturer ■ Most Dependable in the Industry ■ Mine-Specified ■ Field Tested for Over 20 Years!

Our SafetyWhips® brand is globally recognized as a premier brand of Safety Products and Whip Solutions for all vehicle types and equipment needs. Driver Industrial Safety™ produces the highest quality Whips available on the market today. We proudly support the Heavy Equipment industries, Mining, Agricultural, Construction, Aviation, Transportation, and more. Our Complete Whip Solutions offer the most advanced LED light technology supporting various industrial safety programs and practices. In all efforts to secure jobsite requirements and excel safe site practices, Driver Industrial Safety™ continues its drive towards innovative Safety Product Solutions with our various SafetyWhips® product lines; offering customizable options specific to your industry and management needs!

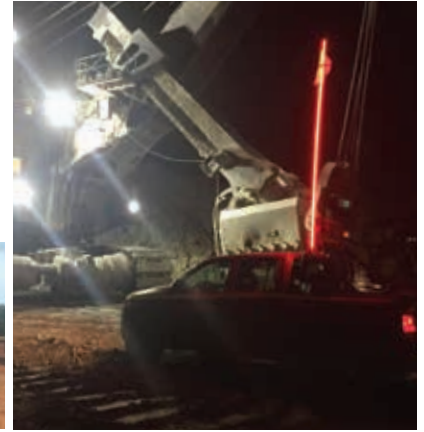

SDL10R-XY
10ft Red Super Duty LED Whip
(shown on minesite support vehicle)

Light Duty Warning Whips



Non-Powered Whips!

SafetyWhips® Light Duty Whips are constructed of safe and non-conductive Fiberglass for all Light Duty vehicle & equipment needs. These non-powered whips are not only affordable, but include a variety of durable flag and mounting options for flag identification of objects or vehicles. Standard whip lengths range from 2ft (.61m) up to 7ft (2.13m) with customizable lengths available upon request. Outfit your fleet today with these affordable Light Duty Warning Whips!



Threaded Bulkhead

Also Available
in 5/8" rod
(ATV375 models)

ATV308-5-SXY
5ft (1.52m), 5/16" rod
Standard Light Duty Whip
11.5" orange safety flag with reflective "X"



LWW05-M
5ft (1.52m), 5/16" rod
Light Duty Whip with Window Mount
11.5" orange safety flag

LWW-MOUNT
Light Duty
Window Mount
Bracket



SW-PLATE MOUNT 4
Available for LWM
Whips for Mounting
on Non-Magnetic
Surfaces



LWM-BH-100
Light Duty
Magnet Cup

LWM05-SXW
5ft (1.52m), 5/16" rod
Light Duty Whip with Magnet Mount*
11.5" orange safety flag with reflective "X"

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent
Safety Colors, UV Resistant,
Anti-Microbial & Fray Resistant



FLAG11-O
Orange
11.5"L x 11.5"H



FLAG11-O-XY
Orange with Yellow Reflective "X"
11.5"L x 11.5"H



FLAG11-O-XW
Orange with White Reflective "X"
11.5"L x 11.5"H

Light Duty Whips (non-powered) Select Light Duty Whips also Available with No Flag, No Bulkhead, No Base - Upon Request

Part # (x=flag option)	Whip Length	Product Description
ATV308-5	5 ft (1.52m)	(5/16" diameter) All Weather Fiberglass Whip, Threaded Bulkhead, with NO FLAG
ATV308NB-5-x	5 ft (1.52m)	(5/16" diameter) All Weather Fiberglass Whip, NO BULKHEAD, with Heavy Duty Mesh Safety Flag
ATV308-5-x	5 ft (1.52m)	(5/16" diameter) All Weather Fiberglass Whip, Threaded Bulkhead, with Heavy Duty Mesh Safety Flag
ATV375-5	5 ft (1.52m)	(3/8" diameter) All Weather Fiberglass Whip, Threaded Bulkhead, with NO FLAG
ATV375NB-5-x	5 ft (1.52m)	(3/8" diameter) All Weather Fiberglass Whip, NO BULKHEAD, with Heavy Duty Mesh Safety Flag
ATV375-5-x	5 ft (1.52m)	(3/8" diameter) All Weather Fiberglass Whip, Threaded Bulkhead, with Heavy Duty Mesh Safety Flag
LWW05	5 ft (1.52m)	All Weather Fiberglass Whip with Light Duty Window Mount (includes brackets), with NO FLAG
LWW05-x	5 ft (1.52m)	All Weather Fiberglass Whip with Light Duty Window Mount (includes brackets), with Mesh Safety Flag
LWM05	5 ft (1.52m)	All Weather Fiberglass Whip with Light Duty Magnet Mount (includes brackets), with NO FLAG
LWM05-x	5 ft (1.52m)	All Weather Fiberglass Whip with Light Duty Magnet Mount (includes brackets), with Mesh Safety Flag

For Additional Safety Flags
(Refer to Page 37)

For Mounting & Accessories
(Refer to Pages 38-41)



Heavy Duty Warning Whips: Threaded Mount (Non-Powered)

Powered Whips Also Available!

SafetyWhips® Heavy Duty Whips are our most common sold whip on the market today! SafetyWhips® Threaded Mount whips are constructed of high quality, safe and non-conductive Heavy Duty Fiberglass with a corrosion-resistant Threaded Hex base for Heavy Duty vehicle and equipment needs. Offered as a Single Piece, Two-Piece Breakdown or even Split-Pole options with Fiberglass Whip Extensions available for added length. Standard whip lengths available from 3ft (0.91m) up to 12ft (3.66m) and whip extensions from 1ft (.30m) to 6ft (1.83m). Customize your Heavy Duty Warning Whip with our array of SafetyWhips® Accessories!



W05NP-X
5ft (1.52m), 1/2" rod
Non-Powered with
16" orange safety flag
with reflective "X"



W08NP-SXY
8ft (2.44m), 1/2" rod
Non-Powered with
11.5" orange safety flag
with reflective "X"



Sealed
Rubber Cap

Threaded
Bulkhead



W10BDSTNP-X
Two-Piece Breakdown Whip
10ft (3.05m), 1/2" rod
Non-Powered with 16" orange
safety flag with reflective "X"

Heavy Duty Stainless
Steel Fitting for Secure
Whip Connection!



EXT-3NP
Heavy Duty Whip Extension
3ft (.91m), 1/2" non-tapered rod
with Threaded Stainless Steel
fittings at top and bottom

Part # Length

EXT-1NP	1ft (.30m)
EXT-2NP	2ft (.61m)
EXT-3NP	3ft (.91m)
EXT-4NP	4ft (1.22m)
EXT-6NP	6ft (1.83m)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent
Safety Colors, UV Resistant,
Anti-Microbial & Fray Resistant



FLAG11-O
Orange
11.5" L x 11.5" H



FLAG11-O-XY
Orange with Yellow Reflective "X"
11.5" L x 11.5" H



FLAG11-O-XW
Orange with White Reflective "X"
11.5" L x 11.5" H



FLAG16-Y-XW
Yellow with White Reflective "X"
16" L x 16" H



FLAG16-G-XW
Green with White Reflective "X"
16" L x 16" H

Standard Whip Lengths	Single Piece, Threaded Whips			Two-Piece, Threaded Breakdown Whips		
	Part #	Part #	Part #	Part #	Part #	Part #
	with 11.5" Mesh Flag	with 11.5" Reflective "X" Mesh Flag	with 16" Reflective "X" Mesh Flag	with 11.5" Mesh Flag	with 11.5" Reflective "X" Mesh Flag	with 16" Reflective "X" Mesh Flag
5 ft (1.52m)	W05NP-M	W05NP-SXY	W05NP-X	W05BDSTNP-M	W05BDSTNP-SXY	W05BDSTNP-X
8 ft (2.44m)	W08NP-M	W08NP-SXY	W08NP-X	W08BDSTNP-M	W08BDSTNP-SXY	W08BDSTNP-X
10 ft (3.05m)	W10NP-M	W10NP-SXY	W10NP-X	W10BDSTNP-M	W10BDSTNP-SXY	W10BDSTNP-X
12 ft (3.66m)	W12NP-M	W12NP-SXY	W12NP-X	W12BDSTNP-M	W12BDSTNP-SXY	W12BDSTNP-X

Custom Whip Lengths & Whip Extensions available upon request!

Recommended Whip Mounts

For Non-Powered, Threaded Mount Whips

Heavy Duty Steel Hitch Mount



HM1NPA
Non-Powered, Threaded Base
Includes 7-Way Plug and
107db Backup Alarm

Threaded Whip Base



519.343NP
Non-Powered
Steel Thread Mount
(optional)

Heavy Duty Spring Base Mounts



519.30BNP
Non-Powered
Zinc Plated

Heavy Duty Angle Bracket Mount



ABM
Permanent Mount
Zinc-Plated Bracket
to attach whips to
toolbox, rack or bed

For Additional Safety Flags
(Refer to Page 37)
For Mounting & Accessories
(Refer to Pages 38-41)



Heavy Duty Warning Whips: Threaded Mount (Powered)

Non-Powered Whips Also Available!

SafetyWhips® Powered Threaded Mount Heavy Duty Whips are our most common whip sold today. Constructed with Heavy Duty Fiberglass, powered with a 1156 Type Socket, and a rust and corrosion resistant Threaded Hex base. Offered as a Single Piece, Two-Piece Breakdown or even Split-Pole options with Fiberglass Whip Extensions available for added length. Standard whip lengths available from 3ft (0.91m) up to 12ft (3.66m) and whip extensions from 1ft (.30m) to 6ft (1.83m). Customize your Powered Heavy Duty Whip with Driver Industrial's various SafetyWhips® Accessories and Mounting Options!



(X = LED color)



1156 Type Light Socket



Powered Threaded Bulkhead with RCA Connection



Heavy Duty Stainless Steel Fitting for Secure Whip Connection!



(xx = LED colors)



EXT-3

Heavy Duty Whip Extension
3ft (.91m), 1/2" non-tapered rod with Threaded Stainless Steel fittings at top and bottom

Part # Length

EXT-1	1ft (.30m)
EXT-2	2ft (.61m)
EXT-3	3ft (.91m)
EXT-4	4ft (1.22m)
EXT-6	6ft (1.83m)

W05-X-SC4Cx

5ft (1.52m), 1/2" rod - Powered with Single Color SC4 Series LED Whip Light (Constant Mode) and 16" orange safety flag with yellow reflective "X"

W08-SXY

8ft (2.44m), 1/2" rod - Powered with 1156 Type Socket and 11.5" orange safety flag with yellow reflective "X"

W08BDST-SXY-SC3xx

Two-Piece Breakdown Whip 8ft (2.44m), 1/2" rod - Powered with Dual Color SC3 Series LED Whip Light and 16" orange safety flag with yellow reflective "X"

Standard Whip Lengths	Single Piece, Threaded Whips			Two-Piece, Threaded Breakdown Whips		
	Part #	Part #	Part #	Part #	Part #	Part #
	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag
5 ft (1.52m)	W05-M	W05-SXY	W05-X	W05BDST-M	W05BDST-SXY	W05BDST-X
8 ft (2.44m)	W08-M	W08-SXY	W08-X	W08BDST-M	W08BDST-SXY	W08BDST-X
10 ft (3.05m)	W10-M	W10-SXY	W10-X	W10BDST-M	W10BDST-SXY	W10BDST-X
12 ft (3.66m)	W12-M	W12-SXY	W12-X	W12BDST-M	W12BDST-SXY	W12BDST-X

Custom Whip Solutions (Lengths, Whip Extensions, Mounting Options) also available upon request!

Recommended Whip Mounts

For Powered, Threaded Mount Whips

Heavy Duty Steel Hitch Mount



HM1A
Powered, Threaded Base Includes 7-Way Plug and 107db Backup Alarm

Heavy Duty Spring Base Mounts



519.30B
Powered Zinc Plated

Threaded Whip Bases



519.343
Powered w/Pigtail Steel Thread Mount (optional)

519.343-RCA
Powered w/RCA Steel Thread Mount (optional)

Heavy Duty Angle Bracket Mount




ABM
Permanent Mount Zinc-Plated Bracket to attach whips to toolbox, rack or bed

Full Color LED Whip Lights!

Single Color

Dual Color



SC4 SERIES (NEW)

Flashing or Non-Flashing Models Available!



SC3 SERIES

All-in-One, Flashing & Non-Flashing Programmable modes!



SCM "MEGA-LITE" SERIES
Mega Programmable, Flashing & Non-Flashing modes!

For all LED Whip Light options (Refer to Page 36)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG16-Y-XW

Yellow with White Reflective "X"
16"L x 16"H



FLAG16-G-XW

Green with White Reflective "X"
16"L x 16"H

For Additional Safety Flags (Refer to Page 37)
For Mounting & Accessories (Refer to Pages 38-41)



Heavy Duty Warning Whips: Quick Disconnect (Non-Powered)

Powered Whips Also Available!

SafetyWhips® Quick Disconnect Whips are heavy duty and the most efficient solution for quick and easy removal on your vehicle. These whips are constructed of safe and non-conductive Heavy Duty Fiberglass and well-known for its quick connection, easy removal, and convenient stow-a-way. Offered as a Single Piece, Two-Piece Breakdown or even Split-Pole options with Fiberglass Whip Extensions available for added length. Standard whip lengths available from 3ft (0.91m) up to 12ft (3.66m) with whip extensions from 1ft (.30m) to 6ft (1.83m). Outfit your whip today with our SafetyWhips® Accessories & Mounting Options!



SW05QDNP-X
5ft (1.52m), 1/2" rod
Non-Powered with
16" orange safety flag
with yellow reflective "X"




SW08QDNP-SXY
8ft (2.44m), 1/2" rod
Non-Powered with
11.5" orange safety flag
with yellow reflective "X"



Sealed
Rubber Cap



Quick
Disconnect
Base

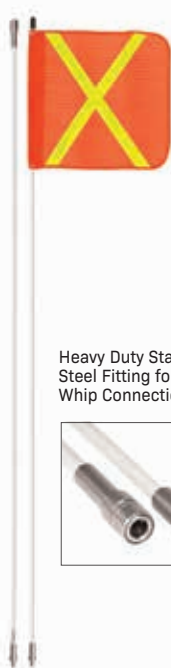

SW10QDNP2-X
Two-Piece Breakdown Whip
10ft (3.05m), 1/2" rod
Non-Powered with 16" orange
safety flag with yellow reflective "X"

Heavy Duty Stainless
Steel Fitting for Secure
Whip Connection!



EXT-3QDNP

Heavy Duty Whip Extension
3ft (.91m), 1/2" non-tapered rod with
Quick Disconnect Stainless Steel
fittings at top and bottom

Part # Length

EXT-1QDNP	1ft (.30m)
EXT-2QDNP	2ft (.61m)
EXT-3QDNP	3ft (.91m)
EXT-4QDNP	4ft (1.22m)
EXT-6QDNP	6ft (1.83m)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent
Safety Colors, UV Resistant,
Anti-Microbial & Fray Resistant



FLAG11-O
Orange
11.5"L x 11.5"H



FLAG11-O-X
Orange with Yellow Reflective "X"
11.5"L x 11.5"H



FLAG11-O-XW
Orange with White Reflective "X"
11.5"L x 11.5"H



FLAG16-Y-XW
Yellow with White Reflective "X"
16"L x 16"H



FLAG16-G-XW
Green with White Reflective "X"
16"L x 16"H

Standard Whip Lengths	Single Piece, Quick Disconnect Whips			Two-Piece, Quick Disconnect Breakdown Whips		
	Part #	Part #	Part #	Part #	Part #	Part #
	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag
5 ft (1.52m)	SW05QDNP-M	SW05QDNP-SXY	SW05QDNP-X	SW05QDNP2-M	SW05QDNP2-SXY	SW05QDNP2-X
8 ft (2.44m)	SW08QDNP-M	SW08QDNP-SXY	SW08QDNP-X	SW08QDNP2-M	SW08QDNP2-SXY	SW08QDNP2-X
10 ft (3.05m)	SW10QDNP-M	SW10QDNP-SXY	SW10QDNP-X	SW10QDNP2-M	SW10QDNP2-SXY	SW10QDNP2-X
12 ft (3.66m)	SW12QDNP-M	SW12QDNP-SXY	SW12QDNP-X	SW12QDNP2-M	SW12QDNP2-SXY	SW12QDNP2-X

Custom Whip Solutions (Lengths, Whip Extensions, Mounting Options) also available upon request!

Recommended Whip Mounts

For Non-Powered, Quick Disconnect Whips

Heavy Duty Steel Hitch Mount



HMQDNP
Non-Powered, Quick Disconnect
Base with 7-Way Plug and
107db Backup Alarm

Quick Disconnect Whip Base



SWQDNP
Non-Powered, Stainless
Steel Quick Disconnect
Mount (optional)

Heavy Duty Spring Base Mounts



519.30BNP
Non-Powered
Zinc Plated

Heavy Duty Angle Bracket Mount



ABM
Permanent Mount
Zinc-Plated Bracket
to attach whips to
toolbox, rack or bed

For Additional Safety Flags
(Refer to Page 37)
For Mounting & Accessories
(Refer to Pages 38-41)



Heavy Duty Warning Whips: Quick Disconnect (Powered)

Non-Powered Whips Also Available!

SafetyWhips® Powered Quick Disconnect Whips provide extended visibility of your vehicle or equipment Day and Night and ensure success for quick and easy removal needs. These whips are constructed of safe and non-conductive Fiberglass with quick connection, easy removal, and convenient stow-a-way capabilities. Offered as Single Piece or Two-Piece Breakdown or even Split-Pole options with Heavy Duty Fiberglass Whip Extensions available for added length. Standard whip lengths available from 3ft (0.91m) up to 12ft (3.66m) with whip extensions from 1ft (.30m) to 6ft (1.83m). Customize your fleet!



(x = LED color)

SW05QD-X-SC4Cx

5ft (1.52m), 1/2" rod - Powered with Single Color SC4 Series LED Whip Light (Constant Mode) and 16" orange safety flag with yellow reflective "X"



1156 Type Light Socket



Powered Quick Disconnect w/ RCA Connection

SW08QD-SXY

8ft (2.44m), 1/2" rod - Powered with 1156 Type Socket and 11.5" orange safety flag with yellow reflective "X"



Heavy Duty Stainless Steel Fitting for Secure Whip Connection!



(x = LED color)

SW08QD2-SXY-SC3xx

Two-Piece Breakdown Whip 8ft (2.44m), 1/2" rod - Powered by RCA with Dual Color SC3 Series LED Whip Light and 16" orange safety flag with yellow reflective "X"



EXT-3QD

Heavy Duty Whip Extension 3ft (.91m), 1/2" non-tapered rod, Quick Disconnect Stainless Steel fittings at top and bottom


Part # Length

EXT-1QD	1ft (.30m)
EXT-2QD	2ft (.61m)
EXT-3QD	3ft (.91m)
EXT-4QD	4ft (1.22m)
EXT-6QD	6ft (1.83m)

Full Color LED Whip Lights!

Single Color

Dual Color



SC4 SERIES (NEW)

Flashing or Non-Flashing Models Available!



SC3 SERIES

All-in-One, Flashing & Non-Flashing Programmable modes!



SCM "MEGA-LITE" SERIES

Mega Programmable, Flashing & Non-Flashing modes!

For all LED Whip Light options (Refer to Page 36)

Standard Whip Lengths	Single Piece, Quick Disconnect Whips			Two-Piece, Quick Disconnect Breakdown Whips		
	Part #	Part #	Part #	Part #	Part #	Part #
	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag	with 11.5" Orange Mesh Flag	with 11.5" Yellow Reflective "X" Mesh Flag	with 16" Yellow Reflective "X" Mesh Flag
5 ft (1.52m)	SW05QD-M	SW05QD-SXY	SW05QD-X	SW05QD2-M	SW05QD2-SXY	SW05QD2-X
8 ft (2.44m)	SW08QD-M	SW08QD-SXY	SW08QD-X	SW08QD2-M	SW08QD2-SXY	SW08QD2-X
10 ft (3.05m)	SW10QD-M	SW10QD-SXY	SW10QD-X	SW10QD2-M	SW10QD2-SXY	SW10QD2-X
12 ft (3.66m)	SW12QD-M	SW12QD-SXY	SW12QD-X	SW12QD2-M	SW12QD2-SXY	SW12QD2-X

Custom Whip Solutions (Lengths, Whip Extensions, Mounting Options) also available upon request!

Recommended Whip Mounts

For Powered, Quick Disconnect Whips

Heavy Duty Steel Hitch Mount



HMQDA

Powered, Quick Disconnect Base with 7-Way Plug and 107db Backup Alarm

Heavy Duty Spring Base Mounts



519.30B
Powered Zinc Plated

Quick Disconnect Bases



SWQD-PT
Powered w/Pigtail Quick Disconnect Steel Mount (optional)



SWQD-R
Powered Quick Disconnect Steel Mount with RCA Type power connector & Pigtail (optional)

Heavy Duty Angle Bracket Mount



ABM

Permanent Mount Zinc-Plated Bracket to attach whips to toolbox, rack or bed

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG16-O-XY

Orange with Yellow Reflective "X" 16"L x 16"H



FLAG16-Y-XY

Yellow with White Reflective "X" 16"L x 16"H

For Additional Safety Flags (Refer to Page 37)
For Mounting & Accessories (Refer to Pages 38-41)



Telescoping Warning Whips: Powered & Non-Powered

The Collapsible, Extendable & Heavy Duty "Adjustable" Whip!



TW11D-X (shown on fleet of vehicles on site)
11ft (3.35m), SafetyWhips® Powered Heavy Duty
Telescoping Whips with 16" Orange Safety Flag



1156 Type
Light Socket



Powered External
Waterproof
Connector
(Male pigtail)

TW11D-GXW

11ft (3.35m), Powered
with (3) Locking Sections,
and 16" green safety flag with
white reflective "X"



FULLY
EXTENDED!

Locking Section



FULLY
COLLAPSED!

Lock




TW-FMT mounted in truck bed

Part # x = flag option	Collapsed Whip Length	Extended Whip Length
TW11D-x	79in (200.66cm)	11ft (3.35m)
TW13D-x	86in (218.44cm)	13ft (3.96m)
TW15D-x	93in (236.22cm)	15ft (4.57m)
TW21D-x	100in (254.00cm)	21ft (6.40m)
TW11NP-x	79in (200.66cm)	11ft (3.35m)
TW13NP-x	86in (218.44cm)	13ft (3.96m)
TW15NP-x	93in (236.22cm)	15ft (4.57m)


Powered & Non-Powered Options (NP = Non-powered)

Full Color LED Whip Lights!

Single Color Dual Color

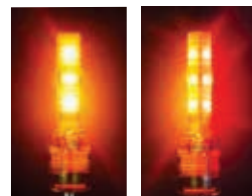

SC4 SERIES (NEW)
Flashing or Non-Flashing
Models Available!

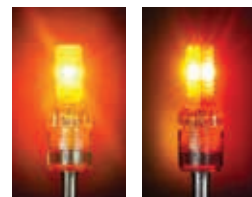

SC3 SERIES
All-in-One, Flashing & Non-Flashing
Programmable modes!



SCM "MEGA-LITE" SERIES
Mega Programmable, Flashing &
Non-Flashing modes!

For all LED Whip Light options
(Refer to Page 36)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent
Safety Colors, UV Resistant,
Anti-Microbial & Fray Resistant



FLAG16-Y-XW
Yellow with White Reflective "X"
16"L x 16"H

For Additional Safety Flags
(Refer to Page 37)
For Mounting & Accessories
(Refer to Pages 38-41)

Recommended Whip Mounts


Assorted Mounting Hardware options for Telescoping Whips - powered & nonpowered available!

External Waterproof Connector



TWPT
Standard Male Connector -
12" Pigtail, use pigtail if
mounting it in a different
manner

Telescoping Whip
Flat Surface Mount



TW-FMT
Powered with Mounting Holes
and Whip Locking Pin -
includes TWPT (+/- power wire)

Side Mount for Telescoping Whips
and Platform Mounts



UPMT
Side Mount to bolt to a toolbox
or other sturdy parts of your
vehicle - includes quick pin

Heavy Duty Steel Hitch Mount



HMTDA
Powered, Telescoping Whip
Base with 7-Way Plug and
107db Backup Alarm
(for Non-Powered use HMTNPA)



Super Duty "All Weather" Warning Whips


Fully Customizable Whip Assemblies, built to handle the most Extreme Weather Conditions!

SafetyWhips® Super Duty All Weather™ Whips are super-sealed and built for strength! These robust whips are no joke. They're extremely reliable with increased durability due to the addition of "locked-in" shielding components (top and bottom); sealing against harsh environments to ensure protection from moisture and corrosion. In addition, we offer complete whip assemblies and optional customization for any Super Duty All Weather™ whip to ensure your needs are met. Standard whip lengths offered from 1ft (.30m) to 12ft (3.66m) with various SafetyWhips® Accessory & Mounting options.




Also Available

With or without a Safety Flag, LED Whip Light, or Heavy Duty Spring!



1156 Type Light Socket
* Heat Shrink Sealing added after install of SafetyWhips® SC Series (SC4 or SC3) LED Whip Light



Heat Shrink Seal
Threaded Hex Whip Base
Super Duty Whip Base with Heavy Duty Powered Spring Mount (optional)



1156 Type Light Socket



(x = LED color)

SD01-SC4Cx
Complete Whip Assembly:
1ft (.30m), 1/2" rod - Powered with Single Color SC4 Series LED Whip Light, Constant Mode
*No Flag or Spring Mount




(x = LED color)

SD02-M-SC3x
Complete Whip Assembly:
2ft (.61m), 1/2" rod - Powered with Single Color SC3 Series LED Whip Light and 11.5" orange safety flag.

Full Color LED Whip Lights!

Single Color

Dual Color



SC4 SERIES (NEW)
Flashing or Non-Flashing Models Available!



SC3 SERIES
All-in-One, Flashing & Non-Flashing Programmable modes!



SCM "MEGA-LITE" SERIES
Mega Programmable, Flashing & Non-Flashing modes!

For all LED Whip Light options (Refer to Page 36)

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG16-O-XY
Orange with Yellow Reflective "X"
16"L x 16"H



FLAG16-G-XW
Green with White Reflective "X"
16"L x 16"H

For Additional Safety Flags (Refer to Page 37)
For Mounting & Accessories (Refer to Pages 38-41)

Product Part # Matrix

Part #		SD 10 - X - 30B - SC3 x	
Super Duty (Threaded Base only)		Whip Light: LED Color	
Total Whip Length		A (Amber) AR (Amber/Red)	
		R (Red) GW (Green/White)	
		G (Green)	
		B (Blue)	
		W (White)	
		LED Light: Head Type (leave blank for none)	
		SC4C (SC4 series, Constant mode)	
		SC4F (SC4 series, Flashing mode)	
		SC3 (SC3 series, Flashing & Non-Flashing)	
		Super Duty Spring Mount (leave blank for none)	
		30B (Super Duty Spring, Zinc Plated)	
		Powered with 12" Flying Lead	
Flag Option			
M (Small, 11.5" Orange Safety Flag)			
SX (Small, 11.5" Safety Flag with Reflective "X")			
X (Large, 16" Safety Flag with Reflective "X")			

Custom Whip Lengths & Assembly options available upon request!

Recommended Whip Mounts

Heavy Duty Spring Base Mounts



519.30B-SD
Zinc Plated

Whip Retaining Hook



RH01

Hold-down hook for use with 8ft (2.44m) or longer Super Duty Whips using a Heavy Duty Spring at the base for best results

Heavy Duty Angle Bracket Mount




ABM

Permanent Mount Zinc-Plated Bracket to attach whips to toolbox, rack or bed



Super Duty LED Warning Whips

The Toughest LED Whip Built To-Date!

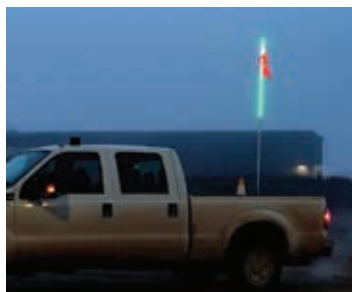

Driver Industrial Safety™ exceeds all industry competition with our fully lit Super Duty LED Warning Whips! Without a doubt, our SafetyWhips® brand of warning whips stepped up with this innovative product solution. The Super Duty LED Whip is a “must have” when you’re vehicle or equipment is experiencing Extremely Harsh weather conditions and in need of a highly visible, extremely durable, reliable, and weather-resistant whip solution. Built with safe and non-conductive heavy duty Fiberglass, these whips are Mine-tough™ and able to handle the worst of conditions. Engineered with advanced LED technology and constructed of a solid fiberglass internal pole with rugged polycarbonate external tubing for advanced protection against impact. SafetyWhips® Super Duty LED Whips allow other drivers to identify operating vehicles sooner, especially in low visibility environments. With standard whip lengths available from 4ft (1.22m) up to 12ft (3.66m), our customization options (custom sizes and LED colors) allow for more efficient workflow for your management team. Identify specific job functions, contractors and site personnel quickly. Depend on Driver to provide enhanced solutions for your site safety!

SDL04G-XY (shown with Green LEDs)

4ft (1.22m), SafetyWhips® Super Duty LED Whip with 16" Orange Safety Flag with Reflective "X"



Available With or Without a Safety Flag!



Protective Pressure Humidity Vent
To equalize pressures while blocking water & contaminants

SDL04x

4ft (1.22m) - Rod only
Super Duty LED Whip
*No Flag included
(x = LED color)



Threaded Base

Optional Quick Disconnect conversion kit also available (kit sold separately)

External Waterproof Connector

SDL06R-XY

6ft (1.82m) - Red LEDs
Super Duty LED Whip with 16" orange safetyflag with yellow reflective "X"



10ft of protected LED lighting from top to bottom!



SDL04W-XY

SDL04G-XY

SDL04B-XY

SDL04R-XY

SDL04A-XY

Standard Whip Lengths	Super Duty LED Whip
	Part #
	with 16" Yellow Reflective "X" Orange Mesh Flag
4ft (1.22m)	SDL04x-XY
6ft (1.82m)	SDL06x-XY
8ft (2.44m)	SDL08x-XY
10ft (3.00m)*	SDL10x-XY
12ft (3.66m)*	SDL12x-XY

x = LED Color (A, R, G, B, or W)

*SDL-WSSM-KIT required

Available in 12Vdc and 24 Vdc!

*When installing, use a minimum of 16 gauge wire and an amp fuse.

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG11-O-XY

Orange with Yellow Reflective "X"
11.5"L x 11.5"H



FLAG11-R-XW

Red with White Reflective "X"
11.5"L x 11.5"H



FLAG16-O-XW

Orange with White Reflective "X"
16"L x 16"H

Recommended Whip Mounts

Whip Stabilizer Spring Mount (WSSM)



SDL-WSSM-KIT
Non-Powered, Stainless Steel Kit

Heavy Duty Steel Hitch Mount



HMSDA
Powered, Threaded Base
Includes 7-Way Plug and 107db Backup Alarm

Whip Mount Adapter Kits



SWQD-KIT-NP
Non-powered, Stainless Steel Quick Disconnect Kit

Heavy Duty Spring Base Mounts



519.308NP
Non-Powered Zinc Plated

Heavy Duty Angle Bracket Mount



ABM
Permanent Mount Zinc-Plated Bracket to attach whips to toolbox, rack or bed

For Additional Safety Flags
(Refer to Page 37)
For Mounting & Accessories
(Refer to Pages 38-41)




Super Duty LED Warning Whips

The Toughest LED Whip Built To-Date!

Dual Color Super Duty LED Warning Whips

Driver Industrial Safety™ is thrilled to introduce our new Dual Color Super Duty LED Warning Whips, designed with two color visibility in response to customer feedback.

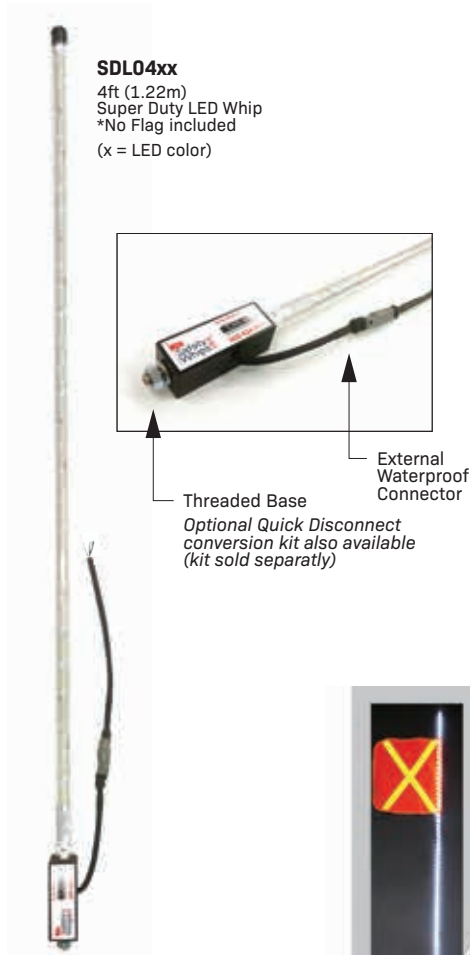


SDL04xx
4ft (1.22m)
Super Duty LED Whip
*No Flag included
(x = LED color)

Threaded Base

Optional Quick Disconnect conversion kit also available (kit sold separately)


External Waterproof Connector

LED Color Combinations Available!



Standard Whip Lengths	Super Duty LED Whip
	Part #
	with 16" Yellow Reflective "X" Orange Mesh Flag
4ft (1.22m)	SDL04xx-XY
6ft (1.82m)	SDL06xx-XY
8ft (2.44m)	SDL08xx-XY
10ft (3.00m)*	SDL10xx-XY
12ft (3.66m)*	SDL12xx-XY


xx = LED Color Combinations Available (A, R, G, B, or W)
*SDL-WSSM-KIT required

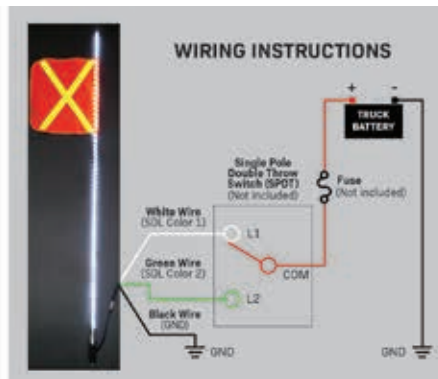

Available in 12 Vdc and 24 Vdc!
*When installing, use a minimum of 16 gauge wire and an amp fuse.

12' Super Duty LED Warning Whips

Driver Industrial Safety™ is thrilled to introduce our new 12' Super Duty LED Warning Whip, designed for exceptional visibility in response to customer feedback. This innovative **SafetyWhips®** product is perfect for vehicles and equipment in harsh weather conditions, providing a highly visible, durable, and reliable solution. Also introducing our Whip Stabilizer Spring Mount (WSSM), required for stabilizing all 10' and 12' whips in windy conditions.

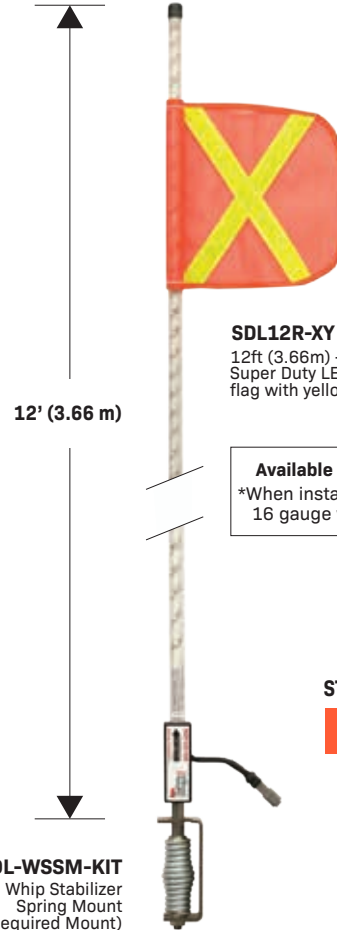

SDL12R-XY
12ft (3.66m) - Red LEDs
Super Duty LED Whip with 16" orange safety flag with yellow reflective "X"

Available in 12 Vdc and 24 Vdc!
*When installing, use a minimum of 16 gauge wire and an amp fuse.

STANDARD SAFETY FLAG OPTIONS



Heavy Duty Mesh, Fluorescent Safety Colors, UV Resistant, Anti-Microbial & Fray Resistant



FLAG11-O-XY
Orange with Yellow Reflective "X"
11.5"L x 11.5"H




FLAG16-O-XW
Orange with White Reflective "X"
16"L x 16"H

For Additional Safety Flags (Refer to Page 37)
For Mounting & Accessories (Refer to Pages 38-41)

Required WSSM Whip Mount

Required for All 10' and 12' Super Duty LED Whips!
(Recommended for 8' SDL Whips).

SDL-WSSM-KIT | Whip Stabilizer Spring Mount

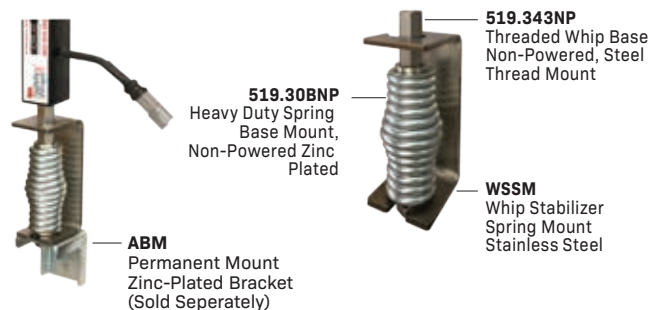

519.30BNP
Heavy Duty Spring Base Mount, Non-Powered Zinc Plated

ABM
Permanent Mount Zinc-Plated Bracket (Sold Separately)

519.343NP
Threaded Whip Base Non-Powered, Steel Thread Mount

WSSM
Whip Stabilizer Spring Mount Stainless Steel



519.343NP
Threaded Whip Base, Non-Powered, Steel Thread Mount



519.30BNP
Heavy Duty Spring Base Mount, Non-Powered Zinc Plated



WSSM
Whip Stabilizer Spring Mount Stainless Steel



Heavy Duty LED Whip Lights: SC Series

High Quality, Premium LED Components ■ Single & Dual Colors ■ Compatible on Various Powered Warning Whips!

Colors Available A B W G R

SCM Series



- **Bright LEDs** for Extended Vehicle/Equipment Visibility (72 LEDs).
- **360 Degree Visibility**
- **Impact and Break Resistant** - High profile Lexan casing
- **Programmable Light Sensor** for Night time Visibility
- **Multi-Voltage**: Safely from 10 to 40 Volt
- **Withstands Extreme Weather Conditions**
- **"Lock and Seal" System** - safely securing light to base and sealing against Corrosion, Moisture and Harsh Environments!
- **"Easy-to-Use" Magnet Operation for User-Friendly Programming** between flashing and non-flashing modes

Product Part # Matrix	
SCM - A	
LED Mega-Lite Series Programmable Flashing and Non-Flashing Modes	LED Light Colors*
	A (Amber) B (Blue) W (White) G (Green) R (Red) AR (Amber/Red) AW (Amber/White) GW (Green/White)
* Multiple color combinations available upon request	

100,000 Hour LED Life! (for 1156 Type Sockets)
12 volts = .445 amps / 5.34 watts
24 volts = .280 amps / 6.72 watts

SC4 Series



- **Bright LEDs** for Extended Vehicle/Equipment Visibility
- **360 Degree Light Diffusion** - Uniformed Brightness
- **Impact and Break Resistant** - High profile Lexan casing
- **Multi-Voltage**: Safely from 10 to 40 Volt
- **Withstands Extreme Weather Conditions**
- **"Lock and Seal" System** - safely securing light to base and sealing against Corrosion, Moisture and Harsh Environments
- **Constant and Non-Flashing** models available

Product Part # Matrix	
SC4 - C R	
LED Whip Light Series Flashing or Non-Flashing options	LED Light Colors*
	A (Amber) B (Blue) W (White) G (Green) R (Red) AR (Amber/Red) GW (Green/White)
* Multiple color combinations available upon request	

100,000 Hour LED Life! (for 1156 Type Sockets)
12 volts = .075 amps / 0.9 watts
24 volts = .045 amps / 1.08 watts

SC3 Series



- High Performance, **Super Bright LEDs** for Hi-Visibility vehicle and equipment identification!
- Low Profile, Innovative Design with **360 degree Light Diffusion** - creates Uniformed Brightness
- **Programmable Light Sensor** for Night time Visibility
- Rugged **Impact and Break Resistant** structure for withstanding Extreme Environmental Conditions!
- **Multi-Voltage**: Safely from 10 to 40 Volt
- **"Lock and Seal" System** - safely securing light to base, sealing against Corrosion, Moisture and Harsh Environments!
- **"Easy-to-Use" Magnet Operation for User-Friendly Programming** between flashing and non-flashing modes
- **Multiple Safety Color Combinations** to help identify specific job functions, contractors & site personnel

Product Part # Matrix	
SC3 - A	
LED Whip Light Series Both Flashing and Non-Flashing Programmable Mode Compatibility	LED Light Colors*
	A (Amber) B (Blue) W (White) G (Green) R (Red) AR (Amber/Red) AW (Amber/White) GW (Green/White)
* Multiple color combinations available upon request	

100,000 Hour LED Life! (for 1156 Type Sockets)
12 volts = .125 amps / 1.5 watts
24 volts = .073 amps / 1.752 watts

Heavy Duty Safety Flags

Hi-Visibility Fluorescent Safety Colors ■ 3M™ Reflective Striping ■ UV Resistant, Anti-Microbial & Fray Resistant!

Standard Flag Colors:

PMS Colors are based on the Pantone Matching System.

Orange



PMS 171C

Yellow



PMS 395C

True Yellow



PMS Yellow C

Green



PMS 2287C

True Green



PMS 2426C

Blue



PMS 300C

Red



PMS 7620C

Multiple Color Combinations & Sizes Available for Purchase!

Custom Flag Sizes & Color Options also available upon request!

9" Mesh Safety Flags



FLAG-PO
Orange (PMS 171 C)
12"L x 9"H
(30.5cm x 22.8cm)



FLAG-PB
Blue (PMS 300 C)
12"L x 9"H
(30.5cm x 22.8cm)



FLAG-PO-SY
Orange (PMS 395 C) &
Yellow 3M Stripe
12"L x 9"H
(30.5cm x 22.8cm)



FLAG-PO-SW
Orange (PMS 395 C) &
White 3M Stripe
12"L x 9"H
(30.5cm x 22.8cm)

11.5" Mesh Safety Flags

Includes (2) Hog Rings



FLAG11-O
Orange (PMS 171 C)
11.5"L x 11.5"H (29cm x 29cm)



FLAG11-Y
Yellow (PMS 395 C)
11.5"L x 11.5"H (29cm x 29cm)



FLAG11-G
Green (PMS 2287 C)
11.5"L x 11.5"H (29cm x 29cm)

11.5" Mesh Safety Flags with 3M™ Reflective "X"

Includes (2) Hog Rings



FLAG11-O-XY
Orange (PMS 171 C)
with Yellow 3M Reflective "X"
11.5"L x 11.5"H (29cm x 29cm)



FLAG11-Y-XW
Yellow (PMS 395 C)
with White 3M Reflective "X"
11.5"L x 11.5"H (29cm x 29cm)



FLAG11-G-XW
Green (PMS 2287 C)
with White 3M Reflective "X"
11.5"L x 11.5"H (29cm x 29cm)

16" Mesh Safety Flags with 3M™ Reflective "X"

Includes (2) Hog Rings



FLAG16-O-XY
Orange (PMS 171 C)
with Yellow 3M Reflective "X"
16"L x 16"H (40.6cm x 40.6cm)



FLAG16-Y-XW
Yellow (PMS 395 C)
with White 3M Reflective "X"
16"L x 16"H (40.6cm x 40.6cm)



FLAG16-G-XW
Green (PMS 2287 C)
with White 3M Reflective "X"
16"L x 16"H (40.6cm x 40.6cm)

12" Metal Flags

NEW!

- Up to (3) 9"H Characters - Numbers / Letters
- Various Fluorescent Color Combinations Available:



9"H Characters with Fluorescent
3M™ Diamond Grade™ Reflective Backing

Double-sided with
9"H Characters

FLAG-AN

Metal Flag with Black Non-Reflective Vinyl
Numbers and Reflective Yellow Green Background
Flag Size: 12" x 12"
(Whip sold separately)

Aviation & Transportation Nylon Safety Flags



Nylon Streamer

FLAG-Streamer-O

Flourescent Orange Nylon
with (1) 5/8" end Grommet
18"L x 2"H (45.7cm x 5.1cm)



Light Duty Nylon Windsock

FLAG-WS8-19

Flourescent Orange with Grommets
Windsock Size: 19"L x 8"D (48.3cm x 20.3cm)
(All Hardware Sold Separately, Part #: FLAG-WS8-HW)

Other windsock sizes
and colors available



Heavy Duty Nylon Windsock

FLAG-WS18-96

Flourescent Orange with Grommets
Windsock Size: 96"L x 18"D (243.8cm x 45.7cm)
(All Hardware Sold Separately, Part #: FLAG-WS18-HW)



Airport Checkered Nylon Flag

FLAG-APF

Heavy Duty Airport Safety Flag
White & Orange Checkered
Flag Size: 36"L x 36"D (91.4cm x 91.4cm)

Heavy Duty Warning Whip Bases & Adapters

Powered & Non-Powered Options Available!

Whip Mount Bases

Threaded Hex Whip Receiving Mounts

(For use with Threaded Base Whips)



Steel Thread Mounts


- A 519.343NP**
Non-powered, Threaded Hex base
- B 519.343-RCA**
Powered, Threaded Hex Base with RCA Connection for quick power connection using included Hot Plug (Part#: HP.2, also sold separately)
- C 519.343**
Powered, Threaded Hex base with affixed Pig Tail single positive lead wire for power at the bottom for a solid hardwire connection

Heavy Duty Spring Mounts



Quick Disconnect Whip Receiving Mounts

(For use with Quick Disconnect Whips)



Stainless Steel Quick Disconnect Mounts

- D SWQDNP**
Non-powered, Quick Disconnect base
- E SWQD-PT**
Powered, Quick Disconnect base with affixed Pig Tail single positive lead wire for power at the bottom for a solid hardwire connection
- F SWQD-R**
Powered, Quick Disconnect base with RCA connection for quick power connection using included Hot Plug (Part#: HP.2, also sold separately)

Non-Powered Springs

- G 519.30BNP**
Non-Powered, .283 Zinc-Plated Barrel Spring Base (Added resistance to corrosion)

Powered Springs

- H 519.30B**
Powered, .283 Zinc-Plated Barrel Spring Base with RCA connection at bottom (Added resistance to corrosion)

Whip Mount Adapter Kits

Also Available - single adapters without a receiving mount

Quick & Easy Conversion of Your SafetyWhips® Threaded Mount Base to a Quick Disconnect!

(For use when converting 1/2" - 20 Thread whip connection to Quick Disconnect connection)



Non-Powered

- K SWQD-KIT-NP (Kit)**
Non-powered, Stainless Steel Quick Disconnect Kit that includes Whip Adapter & Quick Disconnect Receiving Mount
- L SWQD-WA-NP (Adapter Only)**
Non-Powered, Stainless Steel Quick Disconnect Whip Adapter. Adapter threads to the base of a threaded whip to convert the end to Quick Disconnect



Powered with Lead

- M SWQD-KIT-PT (Kit)**
Powered, Stainless Steel Quick Disconnect Kit that includes Whip Adapter & Quick Disconnect Receiving Mount with affixed Pig Tail single power lead
- N SWQD-WA (Adapter Only)**
Powered, Stainless Steel Quick Disconnect Whip Adapter. Adapter threads to the base of a threaded whip to convert the end to Quick Disconnect



Powered w/Detachable RCA Lead

- O SWQD-KIT-R (Kit)**
Powered, Stainless Steel Quick Disconnect Kit that includes Whip Adapter & Quick Disconnect Receiving Mount with RCA connection using included Hot Plug (HP.2)
- P SWQD-WA (Adapter Only)**
Powered, Stainless Steel Quick Disconnect Whip Adapter. Adapter threads to the base of a threaded whip to convert the end to Quick Disconnect.

Heavy Duty Warning Whip Mounts

Options for Powered & Non-Powered Warning Whips (Threaded or Quick Disconnect)

Permanent Mounts



Angle Bracket Mount

ABM

Heavy duty steel mount that works great with Powered and Non-Powered Whips, and whip Bases. Zinc-Plated for corrosion resistance.

Attach whips to toolbox, rack or truck bed!



Fold Down Mount with Side Mount Attachment

FDSM

Heavy duty aluminum mount with various mounting solutions. Easily adjusts for right or left side mounting and able to fold down when whip is not in use.



Universal Flat Surface Mount

FSM

Heavy duty steel mount - powder coated in black. Can be used with both Powered & Non-Powered Whips, Threaded or Quick Disconnect.



Stake Pocket Mount

SPM

Heavy duty aluminum mount. Universal Fit with Wedge Application for larger trucks and pickups with stake pockets. Perfect for leased vehicles.

No need to drill holes in vehicles for use!



Fold Down Van Mount



FDVM

Stainless steel mount with a locking spring pin. Versatile function locking whip in an up or down position.

Used on side of vehicles, metal boxes, cranes

NEW! Whip Stabilizer Spring Mount



ABM Permanent Mount Zinc-Plated Bracket (Sold Separately)

519.30BNP Heavy Duty Spring Base Mount, Non-Powered Zinc Plated



519.343NP Threaded Whip Base Non-Powered, Steel Thread Mount

WSSM Whip Stabilizer Spring Mount Stainless Steel

SDL-WSSM-KIT

Super Duty LED Whip Stabilizer Spring Mounting Kit. Required Kit for 10', and 12' Super Duty LED whips (recommended for 8' Super Duty LED whips).

Temporary Mounts



Heavy Duty Magnet Mounts

Our SafetyWhips® Magnet Mounts are a heavy duty, non-destructive solution for temporary whip mounting. Reliable in avoiding any permanent physical damage to your vehicle or equipment especially great for leased equipment. All Magnet Mount options are built with (3) super duty Pull Cup Magnets for enhanced suction, handling maximum speeds up to 35mph / 56kph.

The **Quick Release** feature is the most popular option when ordering a Powered Magnet Mount!

519.33LHR shown with 3ft (.91m) Quick Disconnect Whip



519.320-V

Window Mount with Vacuum Assist

Temporary heavy duty mounting solution with vacuum suction application for quick and easy install & removal of whip on vehicle. Includes Cigarette Cord for Powered Whips

Powered & Non-Powered Options Available! --> For Whips up to 8ft (2.44m)

LWW-Mount

Light Duty Window Mount Bracket



Light Duty Whip mounting solution for temporary install & easy removal of whip on a vehicle. For use with Light Duty ATV308/ATV375 Whips up to 7ft (2.13m)

--> For Non-Powered Whips up to 8ft (2.44m)



519.33LHR*



519.33LRNP **

Powered & Non-Powered Options Available! --> For Whips up to 8ft (2.44m)



519.330

Super Heavy Duty Magnetic Mount

Heavy Duty Magnetic Whip Mount with (4) 150# pull cup magnets. Includes Cigarette Cord for Powered Whip usage.

Maximum Speeds up to 35 mph! Minesite or construction site speeds only. --> For Whips up to 12ft (3.66m)



Heavy Duty Warning Whip Hitch Mounts

Powered & Non-Powered Options Available for Threaded, Quick Disconnect & Super Duty LED Whips!

Standard Hitch Mounts: Powered

* Hitch Mount options made for 2" (5.08cm) Receivers

We offer a variety of Heavy Duty Standard Hitch Mounting options to support all types of our SafetyWhips® Warning Whips. Securing your Whip Assembly properly to your vehicle or equipment is essential for jobsite safety. SafetyWhips® Standard Hitch Mount collection provides multiple heavy duty mounting systems - Screw Mount for standard Threaded Whips, Quick Release Mount for Quick Disconnect Whips, or Telescoping Adapter Mount for Telescoping and Breakdown Whips.

Replacement Accessories (Sold Separately)



HM-B/U Alarm 107dB
Backup Alarm, 12 to 24V



HM-Pin with Cotter Pin
Hitch Pin with Cotter Pin
5/8" x 3" (1.59cm x 7.62cm)



HM-Trailer Plug
Trailer End Plug with
7-Way Plastic Connector



HM1*
Threaded Base,
Includes 7-Way Plug
(Non-powered, Part #: HM1NP)



HM1A*
Threaded Base, Includes 7-Way Plug and
built-in 107db Backup Alarm
(Non-powered, Part #: HM1NPA)



HMQD*
Quick Connect Base,
Includes 7-Way Plug
(Non-powered, Part #: HMQDNP)



HMQDA*
Quick Connect Base, Includes 7-Way Plug
and built-in 107db Backup Alarm
(Non-powered, Part #: HMQDNPA)



HMTD*
Telescoping Base, includes 7-Way Plug
Powered with Deutsch Connector.
(Non-powered, Part #: HMTNP)



HMTDA*
Telescoping Base, includes 7-Way Plug,
built-in 107db Backup Alarm. Powered with
Deutsch Connector.
(Non-powered, Part #: HMTNPA)

NON-POWERED, SUPER DUTY LED WHIP MOUNTS!



HMSDA* / HMSDQDA*
Threaded Base (left) / Quick Disconnect Base (right),
Includes 7-Way Plug and built-in 107db Backup Alarm.
Powered with Deutsch Connector.
(Without 107db Backup Alarm, Part #s: HMSD / HMSDQD)

Extended Hitch Mounts: Powered

Driver and Passenger Side Options Available: For Passenger Side Mounts, add "- PASS" to Item Part#

Extended Side Application mounting options allow the use of your vehicle's hitch receiver for all types of SafetyWhips® Warning Whips. While still being able to utilize the tailgate or rear hatch when needed.

Available Options:

Screw Mount for standard Threaded Whips, Quick Release Mount for Quick Disconnect Whips, or Telescoping Adapter for Telescoping and Breakdown Whips.

* Extended hitch mount options made for 2" (5.08cm) receivers.



HML*
Threaded Base, Includes 7-Way Plug
(Non-powered, Part #: HMLNP)



HMLQD*
Quick Connect Base, Includes
7-Way Plug
(Non-powered, Part #: HMLQDNP)



HMLQDA*
Quick Connect Base, Includes 7-Way Plug
and built-in 107db Backup Alarm
(Non-powered, Part #: HMLQDNPA)



HMLA*
Threaded Base, Includes 7-Way Plug and
built-in 107db Backup Alarm
(Non-powered, Part #: HMLNPA)



HMLTD*
Telescoping Base, Includes 7-Way
Plug. Powered with Deutsch Connector
(Non-powered, Part #: HMLTNP)



HMLTDA*
Telescoping Base, Includes 7-Way Plug
and built-in 107db Backup Alarm.
Powered with Deutsch Connector
(Non-powered, Part #: HMLTNP)

Extended Hitch Mounts
Also Available for
Super Duty LED Whips!
(Part #: HMLSD & HMLSDA)

Additional Accessories / Personal & Traffic Safety

High Quality Electrical Plugs & Connectors ■ Personal Safety Kits ■ Heavy Duty Traffic Safety Accessories

Whip Accessories & Replacement Parts

* Female Connector also available - Part #: TWPT-F

Electrical Plugs & Connectors



RCA.1
RCA Extension Phone Plug with Right Angle Connection and 2-Wire Extension for power connection.



RCA.2
RCA Extension Phone Plug with Straight Plug Connection and 2-Wire Extension for power connection.



HP.2
Hot Plug with wire used to connect positive power. Used with whips that pick up ground through base attachment.



TWPT*
Standard, Dual-Wire Male Deutsch Connector with 12" (30.48cm) Pigtail used on all SafetyWhips® Telescoping Whips. Provides extra protection in Harsh Environments.



519.821
Cigarette Cord Adapter w/ Right Angle RCA Plug.



519.821-DC
Cigarette Cord Adapter with male Deutsch Connector.

Replacement Parts



HM-Pin with Cotter Pin
5/8" x 3" Hitch Mount Pin with Cotter Pin. Fits all Hitch Mounts.



RH01
Whip Retaining Hook recommended for use with 8ft (2.44m) Heavy or Super Duty Whips



HM-B/U Alarm 107db
Backup Alarm, 12 to 24V



HM-Trailer Plug
Trailer End plug with 7-Way plastic connector

First Aid Clean-up Kits & Fire Extinguishers

Easily Stowable & Wall-Mountable!

Products not available in Canada



FA-10P

10 Person First Aid Kit (Plastic Case)

Includes:

Plastic Adhesive Strips, Bandages, Gauze Pads, Gauze Bandage, Adhesive Tape, Antiseptic Towelettes, Aid/Burn Cream Packets, Bandage Scissors, Forceps, Gloves, First Aid Guide



FA-25P

25 Person First Aid Kit (Hard Metal Case)

Includes:

Cold-pak, Plastic Adhesive Strips, Bandages, Gauze Pads, Gauze Bandage, Adhesive Tape, Antiseptic Towelettes, Aid/Burn Cream Packets, Gloves, Medical Scissors, Tweezers, First Aid Guide

ALSO AVAILABLE!

25 Person First Aid Kits - w/Eye Wash Solution
(Part#: FA-25P-EW)



FE-ABC-10T-C
10lb (4.5kg)
Tall Profile
ABC Rating
Aluminum Valve

Bracket sold separately



FE-VB-10-HD-T
Heavy Duty Bracket for 10lb (4.5kg) TALL Profile Fire Extinguisher. Easy to install and store extinguisher!

Available in 2.5, 5, 10T, and 20 lb sizes. Matching brackets available for every size.

ABC dry chemical extinguishers for the three most common fire types: wood and paper (Class A), flammable liquids (Class B), and live electrical equipment (Class C). Monoammonium phosphate agent. UL rated.

UL listed to ANSI/UL 299 and ANSI/UL 711. Rechargeable. Meets OSHA and NFPA 10 requirements for workplace fire extinguishers when properly mounted and inspected.

Industrial Traffic Safety



3M™ Diamond Grade™ Conspicuity

Premium-Grade, High Visibility Reflective engineered with reflective microprismatic lens sheeting and pressure-sensitive adhesive. Effectively used for application to sides and rear of large trucks, trailers and other vehicles. The 983 Series of 3M™ Conspicuity is most durable, providing maximum visibility at multiple angles in for all weather conditions!

Other Color Options Also Available!

TAPE-2-R/W

2" W (2.54cm) material - SOLD BY THE FOOT
Red & White alternating pattern
Red - 6" L (15.24cm) / White - 6" L (15.24cm)



Road Hazard Kit

A premium Roadside Emergency Safety Kit ensuring high visibility alerting in unexpected emergency situations on the road. Quickly alert all motorists to roadside trouble day or night with this Easy-to-Use setup and quick breakdown design. Heavy duty protective storage case also included. Ideal for roadside breakdowns or other emergencies.

Road Flares & Safety Triangle Kits Also Sold Separately!

Includes:

- (1) Highway Safety Triangle Kit (13lbs/6.9kg)
- (4) Road Flares (Red flame with 20 minute burn)

LED Warning Beacons

Reliable Visibility ▪ **Simple Operation** ▪ **Magnet & Permanent Mount** ▪ **Made for Everyday Use**



SL-1M-A

Magnetic Mount, Amber Lens & White LEDs

Reliable warning visibility doesn't need to be complicated. Driver LED Warning Beacons deliver bright, dependable visibility in a simple, durable design built for everyday applications. Choose from magnetic or permanent mount configurations, with amber, blue, green, red, and white lens options to meet a variety of jobsite, facility, and vehicle needs.

The **SL-1M-A magnetic-mount beacon** features a strong magnetic base and a 15-foot power cord with a 12V/24V cigarette plug for quick setup and easy relocation. For a more permanent installation, the **SL-1M-30VDC** provides the same dependable LED visibility in a hardwired, permanent-mount configuration.

Interchangeable lenses add even more flexibility. When a different color is needed, simply replace the lens instead of the entire beacon. With multiple color options, two mounting configurations, and straightforward operation, Driver LED Warning Beacons provide a practical, reliable solution for everyday warning and visibility applications.



SL-1M-A

Permanent Mount, Amber Lens & White LEDs

NEW!



SL-1M-A

Magnetic or
Permanent Mount
(White LEDs / Amber Lens)

Full Color Lens Options Available!




Single Colors


Specifications

Product Attribute	Product Description
Durability	Standard-Duty Construction
Voltage	10-30VDC
Mounting Options	Magnetic and Permanent Mount
Flash Patterns	1
Material (Lens/Base)	ABS / Polystyrene (PS)
Warranty	1 Year

SHORT PROFILE



BASE VIEW



SL-1M-B

Magnetic or
Permanent Mount
(White LEDs / Blue Lens)



SL-1M-W

Magnetic or
Permanent Mount
(White LEDs / White Lens)



SL-1M-G

Magnetic or
Permanent Mount
(White LEDs / Green Lens)



SL-1M-R

Magnetic or
Permanent Mount
(White LEDs / Red Lens)



Explore Our Updated 2026 Driver Industrial Safety™ Catalog



Scan the QR code to view, download and experience our digital catalog.

Scan. View. Download.

Discover our full range of Driver Industrial Safety™ products in our updated digital catalog.

What's Inside: Every Driver Industrial Safety™ brand in one place - New Elasco Products line of cable protectors and dropovers, RhinoGuard® cable protectors and ground protection mats, NVIZN® identification displays, TORO® wheel chocks, and SafetyWhips® warning whips.

Always Current: Print goes out of date. The digital catalog doesn't - we update it as the line changes.

SAFETY IS **ALL WE DO™**



a Subsidiary of Driver Industrial Safety™

Where You Can Find Us

USA LOCATION - COLORADO

Corporate Headquarters

9669 Havana St.
Commerce City, CO 80640

Phone: 833.907.6300

Fax: 602.424.9777

Sales@DriverIndustrial.com

CANADA LOCATION

107-30791 Simpson Road
Abbotsford, BC V2T 6X4, Canada

Phone: 604.560.5080

Fax: 604.560.5090

SalesCanada@DriverIndustrial.com



www.DriverIndustrialSafety.com

Copyright® 2026 Driver Industrial Safety™. All Rights Reserved.